

(12) **United States Patent**
Raichart

(10) **Patent No.:** **US 11,027,447 B2**
(45) **Date of Patent:** **Jun. 8, 2021**

(54) **APPARATUS AND RELATED METHODS FOR TRIMMING DRIED CANNABIS FLOWERS**

(71) Applicant: **GREENBROZ, INC.**, La Jolla, CA (US)
(72) Inventor: **Cullen Raichart**, San Diego, CA (US)
(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 285 days.

(21) Appl. No.: **15/586,206**
(22) Filed: **May 3, 2017**

(65) **Prior Publication Data**
US 2017/0232627 A1 Aug. 17, 2017

Related U.S. Application Data
(62) Division of application No. 14/455,804, filed on Aug. 8, 2014, now abandoned.

(51) **Int. Cl.**
B26D 1/29 (2006.01)
B26D 1/147 (2006.01)
B26D 1/00 (2006.01)
A01G 5/00 (2006.01)
A23N 15/06 (2006.01)
A23N 15/04 (2006.01)
A01G 22/00 (2018.01)

(52) **U.S. Cl.**
CPC **B26D 1/29** (2013.01); **A01G 5/00** (2013.01); **A01G 22/00** (2018.02); **A23N 15/04** (2013.01); **A23N 15/06** (2013.01); **B26D 1/0006** (2013.01); **B26D 1/147** (2013.01); **B26D 2001/0066** (2013.01)

(58) **Field of Classification Search**
CPC B26D 1/29; B26D 1/0006; B26D 1/147; B26D 2001/0066; A01G 22/00; A01G 1/001; A01G 5/00
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,228,800 A *	6/1917	Marshall	B07B 1/22
				209/259
1,436,906 A *	11/1922	Prescott	B26D 1/29
				83/200
2,110,836 A *	3/1938	Arnt	B26D 1/29
				83/401
2,592,833 A	4/1952	Swanson		
4,201,347 A *	5/1980	Elkin	B02C 7/08
				241/100

(Continued)

FOREIGN PATENT DOCUMENTS

WO WO2016023044 A1 2/2016

OTHER PUBLICATIONS

Monster Gardens Dot Com. Green Bros Automatic Dry Flower Bud Trimmer for Dry Product—Trim Dry Machine Green. You Tube. Jul. 21, 2014. [Retrieved on 2015-Oct. 2007] retrieved from Internet <<https://www.youtube.com/watch?v=apfywuHGZbu>>.


Primary Examiner — Jonathan G Riley

(74) *Attorney, Agent, or Firm* — Buche & Associates, P.C.; John K. Buche; Bryce A. Johnson

(57) **ABSTRACT**

In a preferred embodiment, the apparatus comprises: (1) a box with specifically designed blades for cutting; (2) a motor for rotating the blades over each other; (3) a sweeper mechanism to gently move the flowers around the enclosure blade; and, (4) a brush mechanism to gently tumble flowers over the blade surface.

1 Claim, 6 Drawing Sheets

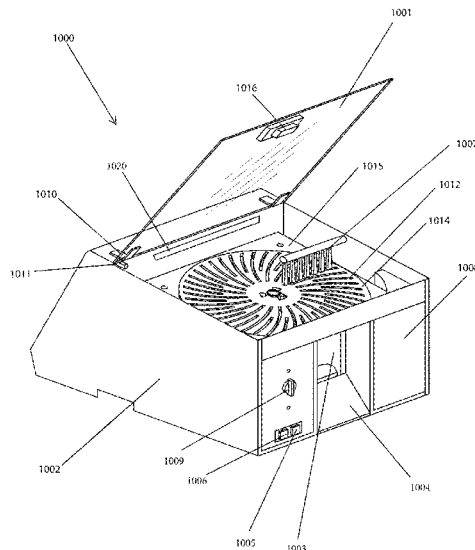

(56)

References Cited

U.S. PATENT DOCUMENTS

4,592,715	A *	6/1986	Nebelung	B26D 1/29 425/289
4,913,019	A *	4/1990	Hayashi	B26D 7/30 83/355
5,474,241	A *	12/1995	Kennedy	B02C 18/14 241/100
7,168,643	B2 *	1/2007	Mercier	A01D 46/005 241/169.1
D755,263	S *	5/2016	Raichart	D15/126
D795,316	S *	8/2017	Raichart	D15/127
D807,131	S *	1/2018	Laeger	D8/7
10,631,467	B1 *	4/2020	Burnett	A01G 3/002
2007/0006905	A1	3/2007	Shouse et al.	
2011/0162539	A1 *	7/2011	Youn	A23N 5/006 99/631
2014/0047964	A1 *	2/2014	Zhao	B26D 3/28 83/167
2014/0196587	A1	7/2014	Beyerlein et al.	
2014/0209718	A1	7/2014	Bevins	
2014/0331837	A1 *	11/2014	Holcomb	B26D 1/38 83/104
2015/0027096	A1 *	1/2015	Black	A01D 34/82 56/10.1
2015/0047485	A1 *	2/2015	Schroeder	A23N 15/06 83/104

* cited by examiner

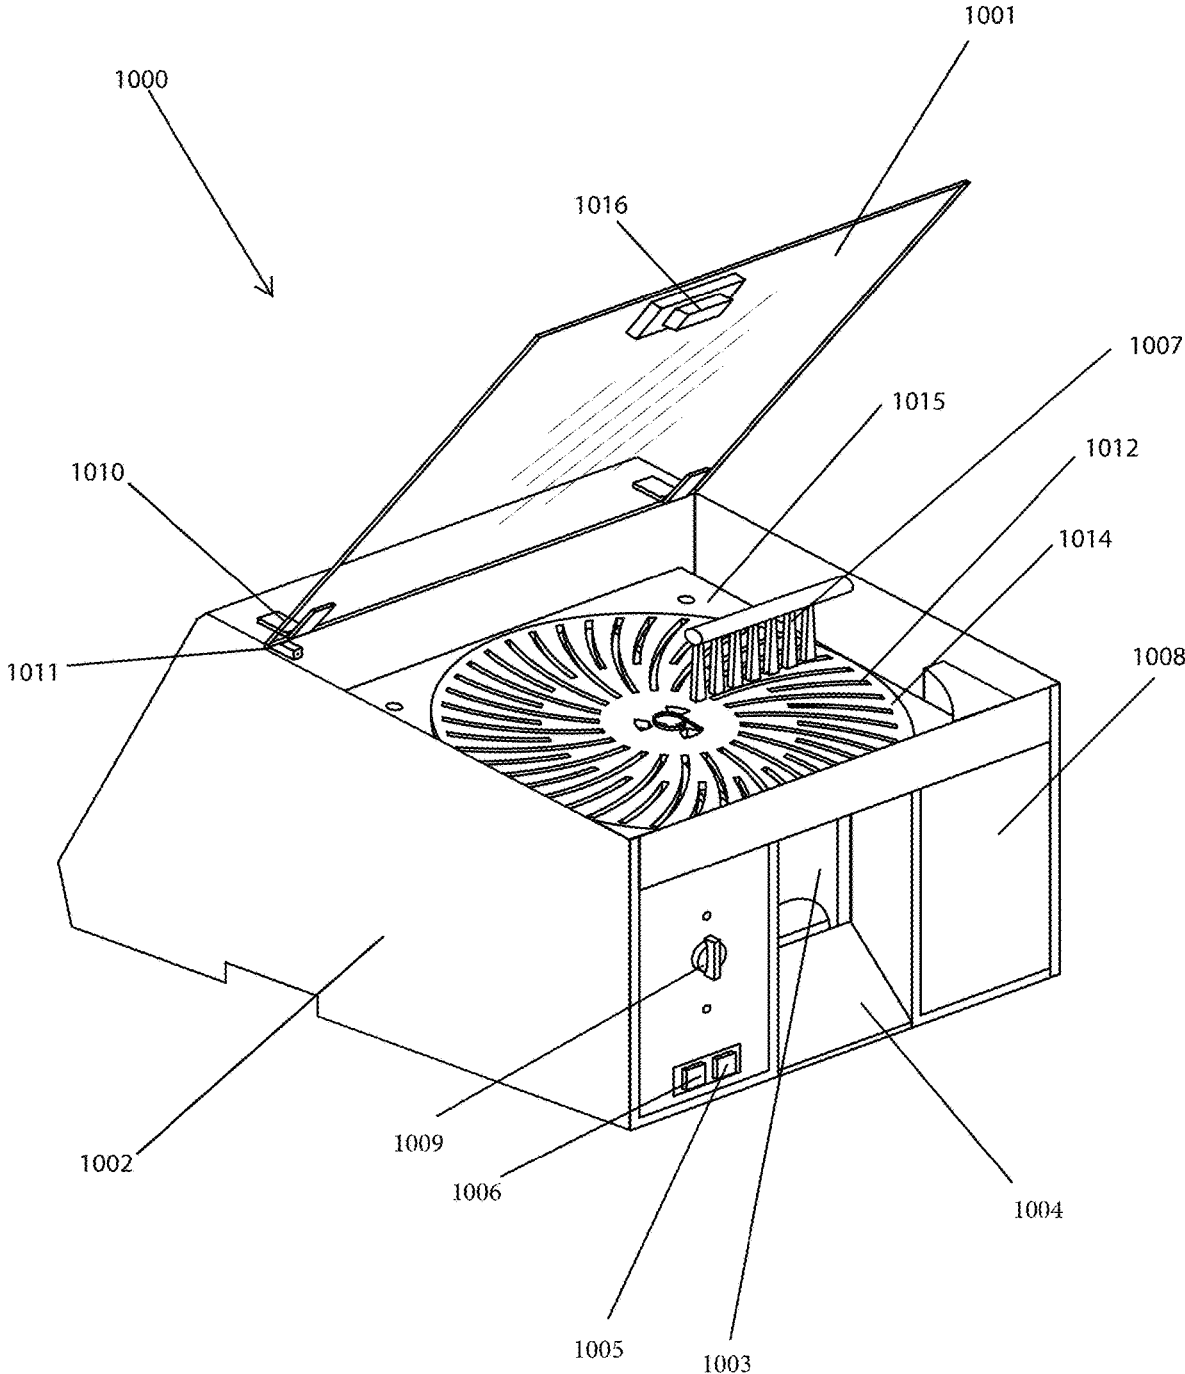


Figure 1

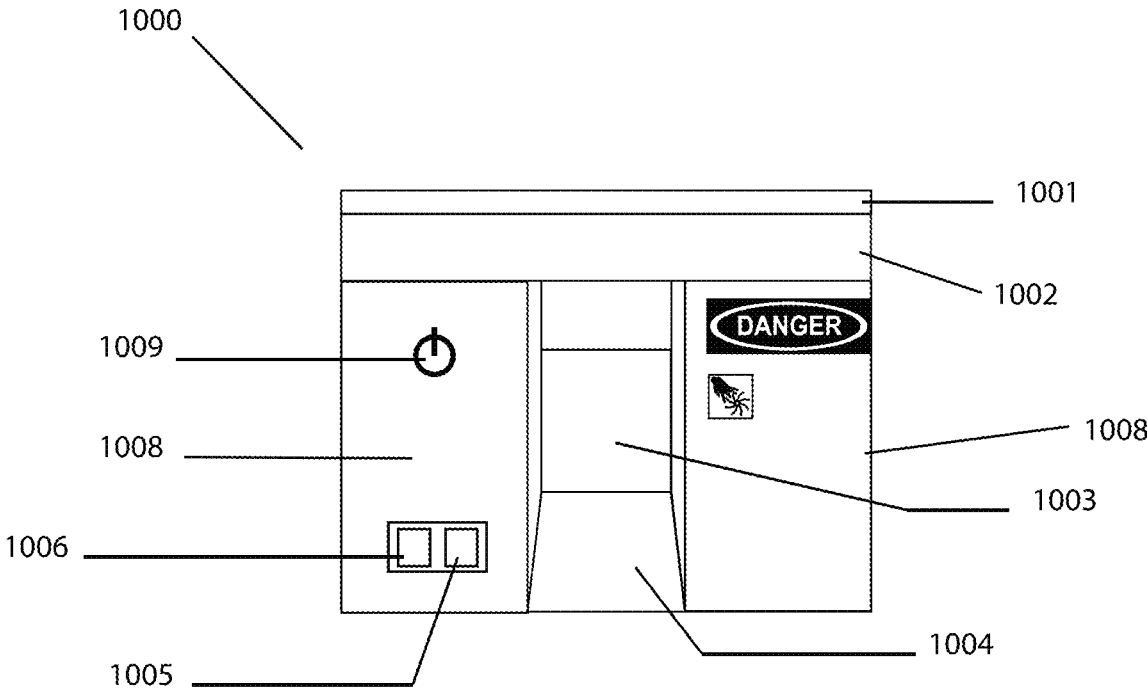


Figure 2

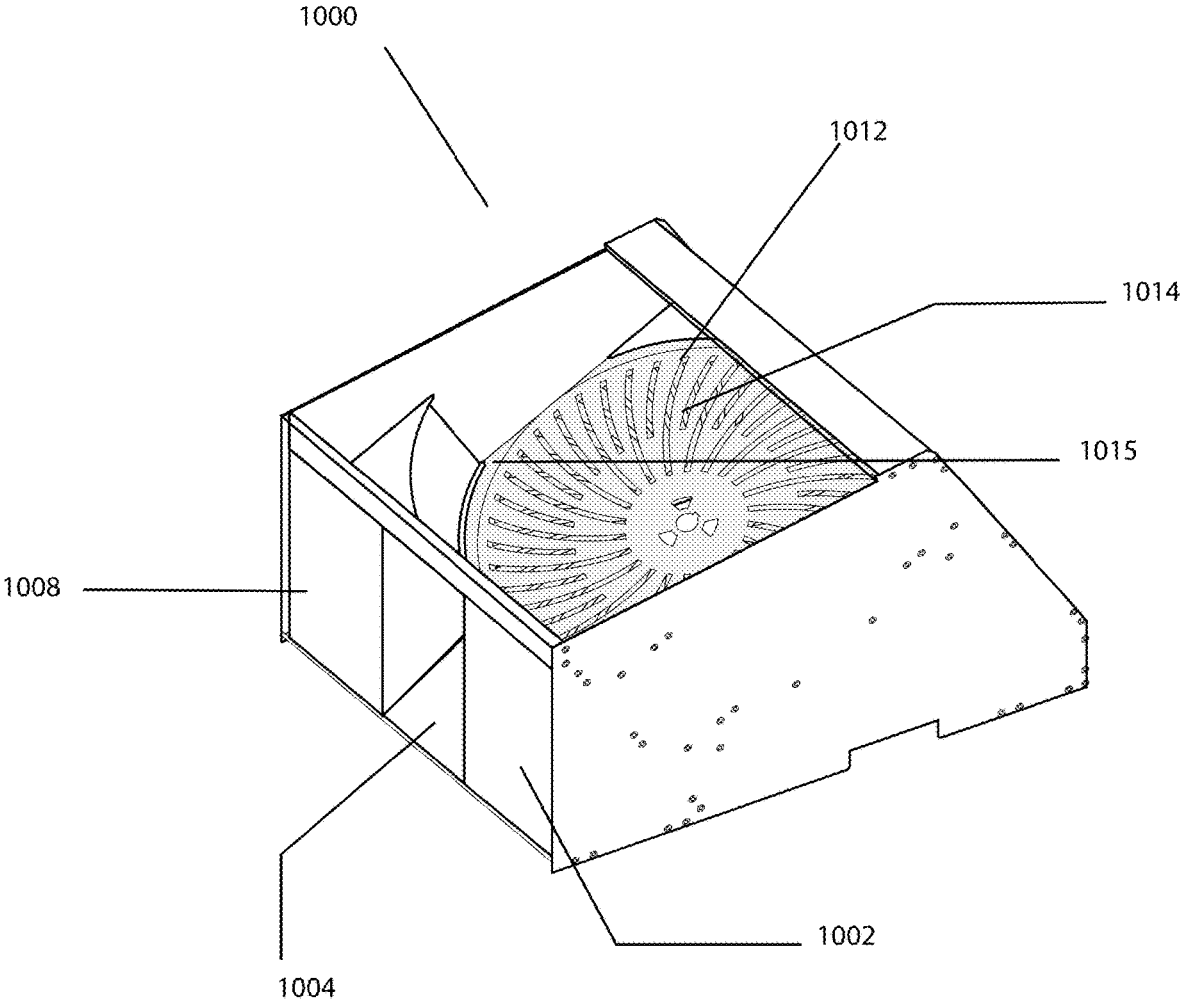


Figure 3

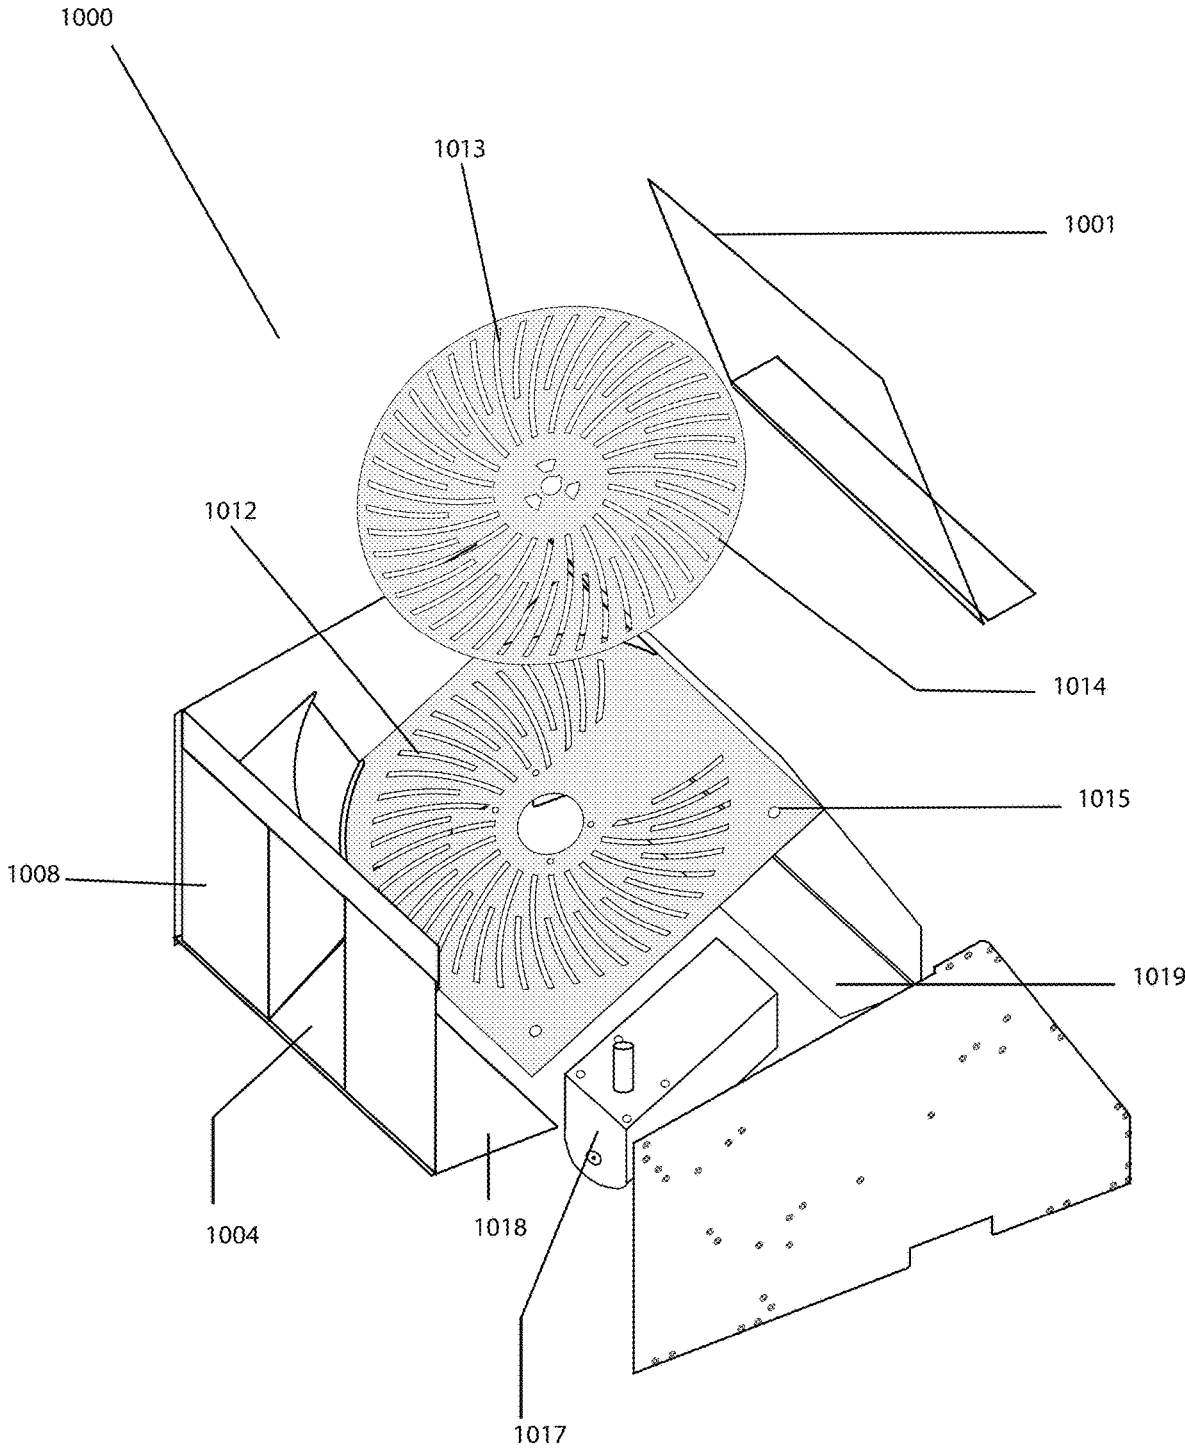


Figure 4

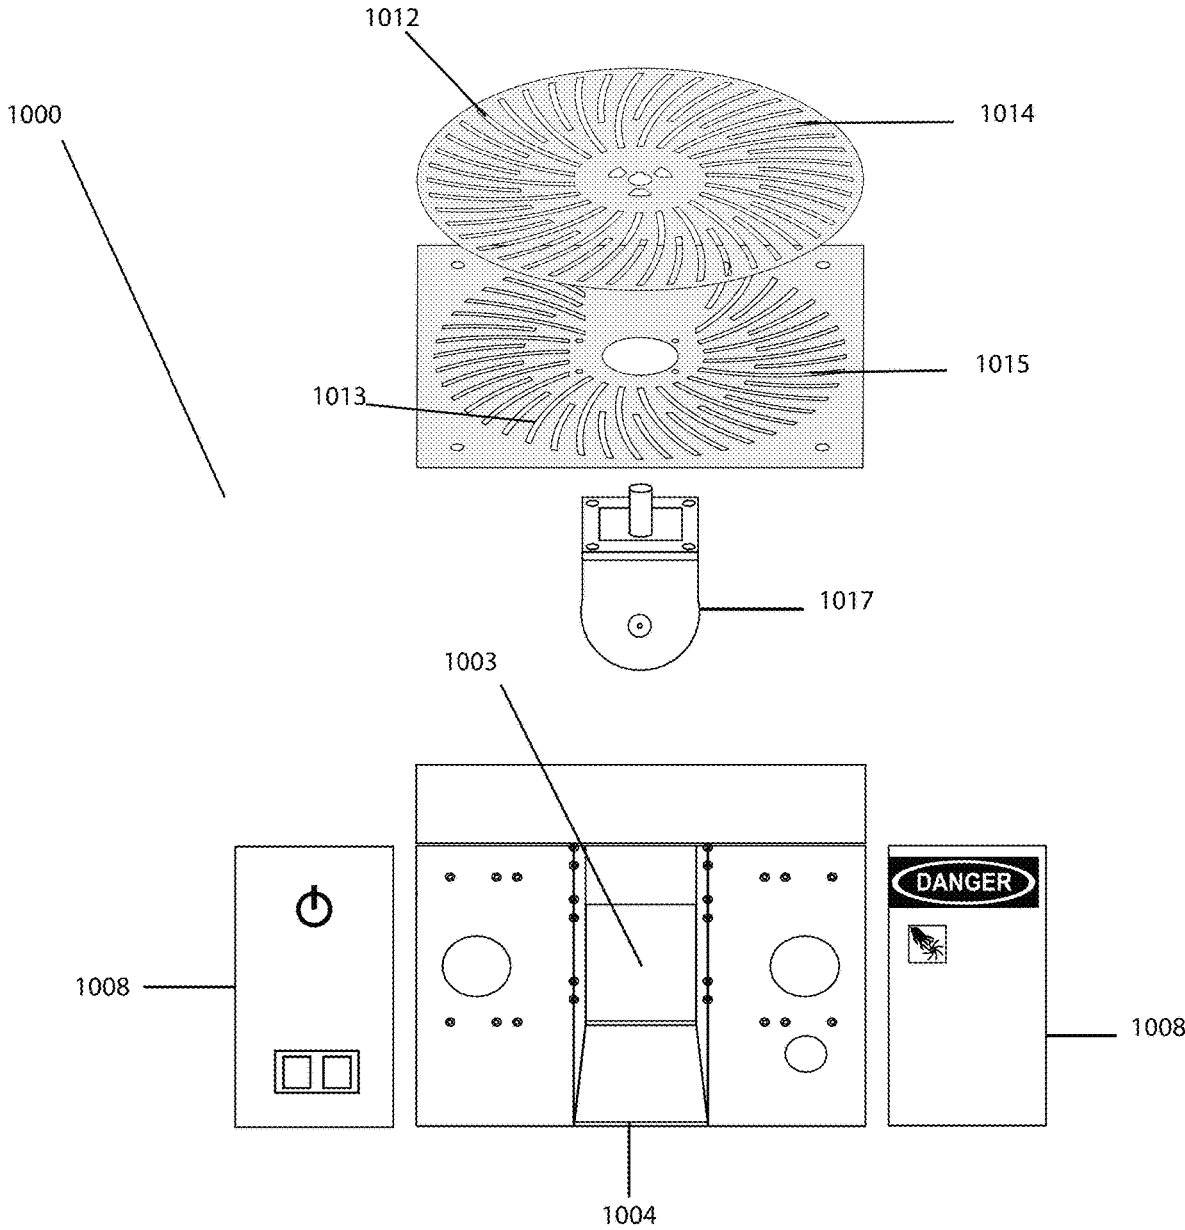


Figure 5

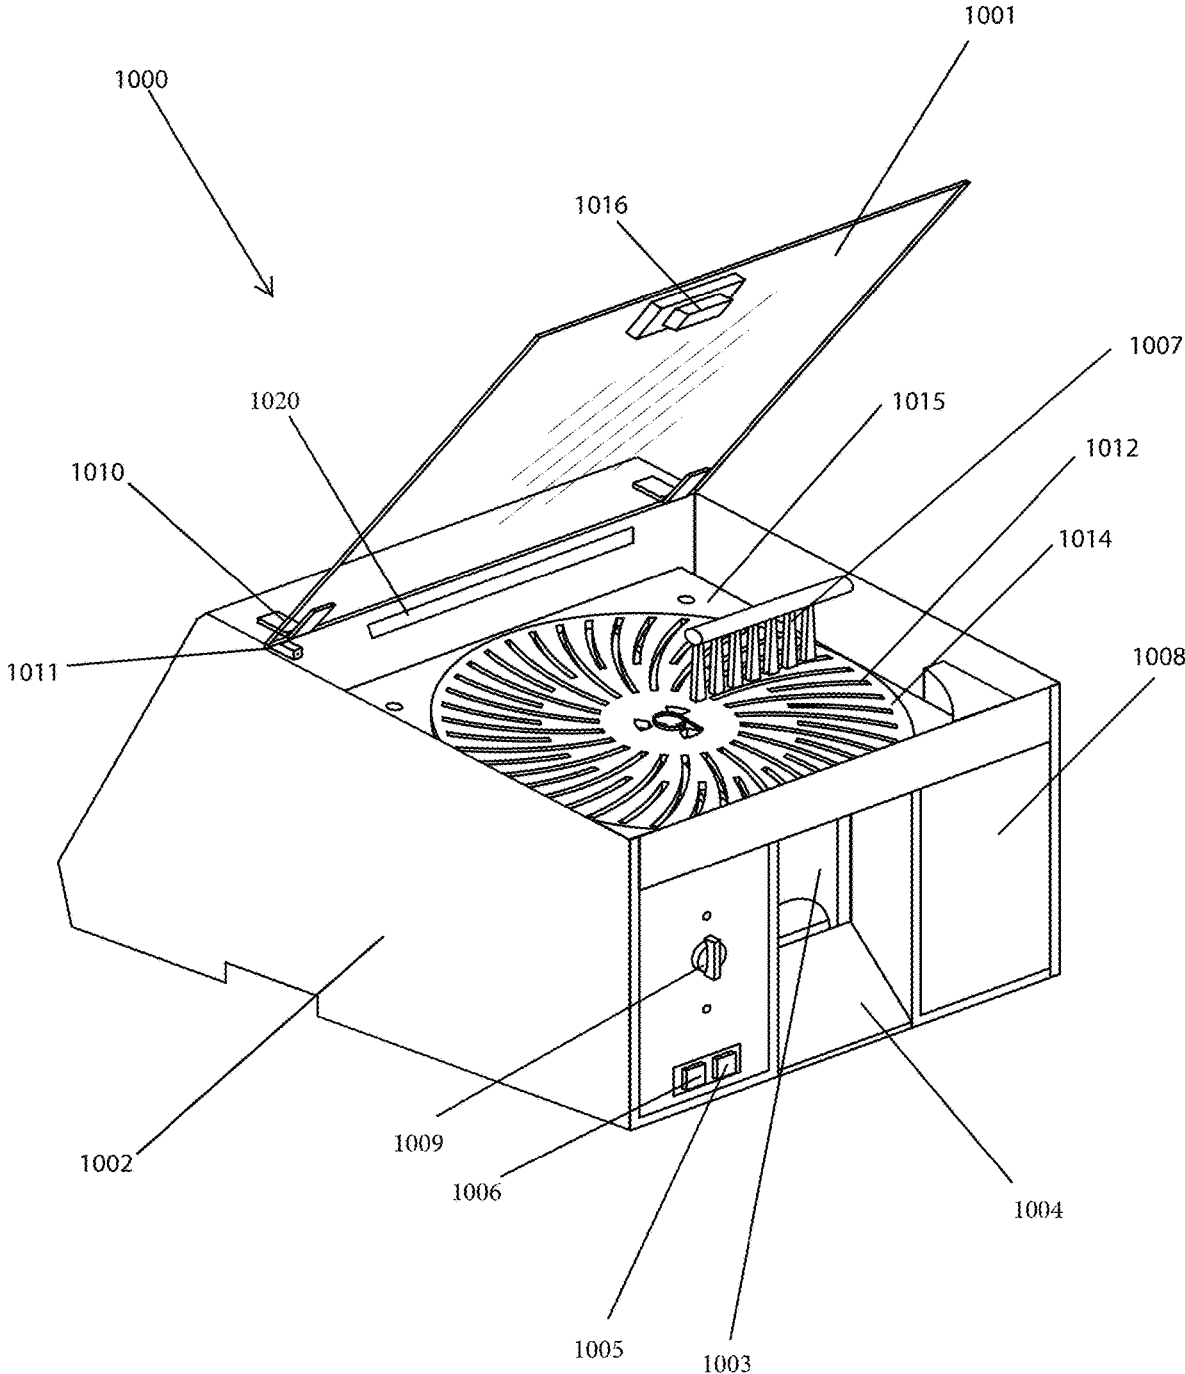


Figure 6

APPARATUS AND RELATED METHODS FOR TRIMMING DRIED CANNABIS FLOWERS

CROSS-REFERENCE TO RELATED APPLICATIONS

This document is a division of U.S. application Ser. No. 14/455,804 (filed Aug. 8, 2014), and that document is hereby incorporated by reference in its entirety.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

Not applicable

BACKGROUND OF INVENTION

Field of invention. This specification describes subject matter in the field of apparatus and related methods of trimming dried plants, including but not limited to *Cannabis*.

Background of invention. *Cannabis* flowers or buds are harvested, dried and cured to be used by people for various purposes including medicinal uses. The *Cannabis* flower contains the highest volume of psychoactive compounds in the *Cannabis* plant. Also, the plant buds may contain non-intoxicating CBD compounds that are of pharmaceutical and medical interest. Cannabidiol (CBD) is one of at least 60 active cannabinoids identified in *Cannabis*. It is a major constituent of the plant, accounting for up to 40% of the plant's extract, as a non-psychoactive phytocannabinoid. CBD is considered by some to have a wider scope of medical applications than tetrahydrocannabinol (THC). In contrast, *Cannabis* leaves contain only trace amounts of psychoactive and other compounds, and usually will go to compost. *Cannabis* flowers have traditionally been hand trimmed to remove the unwanted leafy matter, leaving only the flowers. Typically, hand trimming is done by cutting the leaves off with scissors. The hand trimming of *Cannabis* flowers is time consuming and tedious. Additionally, hand trimming requires skilled labor. Typically, it takes a skilled trimmer about eight to ten hours to trim one pound of *Cannabis*. Trimming at this speed may be feasible for small scale growers, but for larger growers, hand trimming is impractical and can become expensive if the grower must hire outside help.

One solution to hand trimming has been use of machines that automatically trim the plants. These machines can typically trim the same amount of *Cannabis* in one hour that an individual worker can trim in one day. Existing automated methods are designed to trim the flowers while they are freshly harvested or "wet." Wet trimming involves violent action that damages the buds and removes resin glands. The wet trimming action reduces the quality of the end by reducing potency and not allowing proper drying and curing. Furthermore, when buds are trimmed wet, the residue from the buds can leave a sticky mess on a trimmer, necessitating constant cleaning of a trimmer machine. Trimming the *Cannabis* flower when wet reduces potency, appearance and quality.

The alternative to trimming freshly harvested buds is to trim buds that have been dried. Trimming dry buds produces a better smell and flavor. Drying and curing of the *Cannabis* flower is essential to the value and quality of the end product. Trimming of dry *Cannabis* requires a gentle action that does not damage the product. Most trimmers utilize blades that rotate at a high speed. This high speed rotation

is not suitable for trimming dried *Cannabis* plants. Currently no reliable apparatus of automated trimming of dry *Cannabis* is known.

In light of the foregoing, a need exists for a device that automated the trimming of dried *Cannabis* is such a way that is not damaged in appearance, potency or overall quality.

SUMMARY OF THE INVENTION

With the aforementioned in mind, it is an object of this description to disclose a device that trims dried *Cannabis* flowers in a gentle yet effective manner. It is further an objective to disclose apparatus and related methods of trimming *Cannabis* flowers without the drawbacks of heretofore known apparatus. Yet still, it is an objective to disclose apparatus and related methods of trimming dried *Cannabis* flowers so that a higher quality *Cannabis* flower can be used for recreational or medicinal purposes. In a preferred embodiment, the apparatus comprises: (1) a box with specifically designed blades for cutting; (2) a motor for rotating the blades over each other; (3) a sweeper mechanism to gently move the flowers around the enclosure blade; and, (4) a brush mechanism to gently tumble flowers over the blade surface.

In one mode of operation, dried *Cannabis* buds may be put into a box. The motor is then turned on to provide rotation to the blades and a sweeper bar. The rotating of blades creates a scissor action that cuts off the extruding leaves from the buds, while the sweeper bar stirs the flowers so that all sides of the buds are exposed to the scissoring action. The scraper bar then further agitates the bud by removing them from the blade and causing them to tumble. Once trimmed, the buds may be extracted through the extraction port in the side of the box and more buds may then be added to repeat the cycle.

BRIEF DESCRIPTION OF THE FIGURES

The manner in which these objectives and other desirable characteristics can be obtained is explained in the following description and attached figures in which:

FIG. 1 is perspective view of the trimmer.

FIG. 2 is a front view of the trimmer.

FIG. 3 is a perspective view of the trimmer with top exposed.

FIG. 4 is an exploded view that shows the components of the trimmer.

FIG. 5 is an exploded view that shows the components of the trimmer along with the instrument panel.

FIG. 6 is a perspective view of an alternate embodiment of the trimmer.

DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 is a perspective view of preferred embodiment of the trimmer 1000. The trimmer 1000 preferably comprises a box 1002, two blades 1014, 1015 and a sweeper 1007. Both of the blades 1014, 1015 have a pattern of arced openings 1012 (see FIG. 3, 1013). The blades 1014, 1015 are preferably constructed from stainless steel, but can be made from other kinds of metal or alloys. The sweeper 1007 is located above the top blade 1014. The sweeper 1007 gently pushes the plants around and can tumble the plants to ensure that all sides of the plant are cut. In the preferred embodiment, the height of the sweeper 1007 is adjustable so that a user can move the sweeper 1007 up, down or out of the way

depending on the size of the plants to be trimmed. It should also be noted that the trimmer is situated so that the blades are on a downward sloping angle. It has been found that this facilitates a cutting and separating action.

Still referring to FIG. 1, the blades are housed inside of a box **1002**. At the top of the box is a lid **1001**. The lid **1001** opens and closes via a hinge **1010** and the lid **1001** can be secured in place via a latch **1016**. Suitably, the lid **1001** features a sensor **1011**. The sensor **1011** is a safety mechanism that will shut off the machine when the lid **1001** is open. In the preferred embodiment, the lid **1001** is transparent. The lid **1001** is preferably made from a clear Plexiglas®, but may be made of glass or another transparent material. A transparent lid **1001** is preferable because it allows the user to see the trimmer **1000** cut the plant and visually assess the process. The box **1002** is preferably made of metal, but may also be made of a sturdy polymer capable of withstanding high temperatures.

As shown in FIG. 1, the front of the trimmer **1000** consists of two panels **1008**, a door **1003** in the center and a hatch **1004** for permitting access to the cut plants. On the left panel **1008**, there are several controls for the trimmer **1000**. On the top of the left panel **1008**, there is a dial **1009** that controls the speed of the top blade **1014**. On the bottom of the left side panel **1008** there are two switches: a light switch **1005** which controls a light (not shown) and the motor switch **1006** which turns the trimmer **1000** on and off.

FIG. 2 depicts a front view of the trimmer **1000** and shows a more detailed view of the instrument panel that controls the trimmer **1000**. As shown, there are two switches **1005**, **1006** and a control dial **1009** that control the speed of the motor (see FIG. 4, **1017**). In the embodiment shown, the control dial **1009** has three speed settings, but alternate embodiments may have more or fewer settings. In the preferred embodiment of the trimmer **1000**, the motor runs at a speed slower than other typical trimmers. One reason for operating at a slower speed is that the trimmer **1000** can trim dry plants without damaging the buds.

FIG. 3 shows a perspective view of the trimmer **1000** without the lid **1001**. On the inside of the trimmer **1000** are two blades—a circular top blade **1014** and a bottom blade **1015**. Preferably, the arced openings **1012**, **1013** on the blades **1014**, **1015** are narrow so only the smaller extrusions (i.e. leaves) from the *Cannabis* plant are trimmed, while the larger parts or the plant (i.e. the flowers) remain intact. Both blades **1014**, **1015** have arced openings **1012**, **1013** to cut the *Cannabis* plant. The arced openings **1012** on the top blade **1014** are in the opposite direction of the arced openings **1013** on the bottom blade **1015**. The arced openings in **1012**, **1013** are preferably in opposite directions to one another as shown in FIG. 3. The openings **1012**, **1013** may be sharpened to facilitate trimming of the leaves of the plant, but the openings **1012**, **1013** are less sharp than wet trimmers in order to trim the extrusions without damaging the larger plant. The top blade **1014** is circular and rotatably connected to a motor **1017** and the bottom blade **1015** is square and fixedly fastened to the trimmer **1000**. It would be possible to configure the apparatus to that the either the top or the bottom could turn, but this embodiment has the turning action on the top blade **1014**.

FIG. 4 shows an exploded view of the trimmer **1000**. This view depicts the blades **1014**, **1015** more clearly. FIG. 4 also shows how the blades **1014**, **1015** are configured to interact with one another in the preferred embodiment. In the preferred embodiment, the blades **1014**, **1015** are at a 30 degree angle with respect to the box **1002**. The 30 degree angle is preferable for cutting the plants because this angle allows for

the plants to rotate in a gentle motion, although other downward angles may be suitable so that gravity will assist the cutting process. The 30 degree angle is also preferable because when the trimmer is finished, the product falls down toward the door **1003**.

The motor is controlled by the motor switch **1006** and is connected directly to the top blade **1014**. When the motor switch **1006** is turned on, the motor **1017** rotates the top blade **1014**, while the bottom blade remains stationary. The rotation produces a scissor-like effect between the top blade **1014** and bottom blade **1015**. The arced openings **1012**, **1013** are narrow, so that the dried leaves that protrude from the buds will fit through the arced openings **1012**, **1013**. The scissor-like effect will cut the leaves buds. The bottom blade **1015** does not have openings at the top center so that clippings do not fall through onto the motor. Dried clippings falling onto the motor can be troublesome to clean up and presents a fire hazard.

FIG. 4 also depicts two bottom panels **1018**, **1019**. In the preferred embodiment, the bottom panels **1018**, **1019** do not fully cover the bottom of the box **1002**, leaving an opening beneath the trimmer **1000**. This allows a user to place the trimmer **1000** on top of a bin or bag in order to collect the cut leaves.

FIG. 5 depicts an exploded view of the trimmer **1000** and shows the front panels **1008**, the motor **1017**, the hatch **1004**, the door **1003**, and the blades **1014**, **1015**. FIG. 5 shows how the pattern of the arced openings **1012**, **1013** of the blades **1014**, **1015** are complimentary to each other, and how the arcs are preferably oriented in opposite directions to one another.

FIG. 6 shows an alternate embodiment of the trimmer **1000**. This embodiment features a germicidal lamp **1020**. The germicidal lamp is a UV producing light that will kill harmful bacteria that may be found on the buds.

To operate the trimmer **1000**, a user lifts the lid **1001** and places the product on top of the top blade **1015**. The user may adjust the sweeper **1007**, if the user desires. The user then closes the lid **1001** and uses the switch **1006** to turn on the motor **1017**. The motor **1017** rotates the top blade **1015**, gently trimming the extrusions of the plant. The sweeper **1007** pushes the plant around, so that all sides of the plant are trimmed. When the plant is trimmed, the user turns off the motor **1017**, and can retrieve the finished product by opening the door **1003** and allowing the product to fall through the hatch **1004**.

While various embodiments of the method and apparatus have been described above, it should be understood that they have been presented by way of example only, and not of limitation. Likewise, the various diagrams might depict an example of an architectural or other configuration for the disclosed method and apparatus, which is done to aid in understanding the features and functionality that might be included in the method and apparatus. The disclosed method and apparatus is not restricted to the illustrated example architectures or configurations, but the desired features might be implemented using a variety of alternative architectures and configurations. Indeed, it will be apparent to one of skill in the art how alternative functional, logical or physical partitioning and configurations might be implemented to implement the desired features of the disclosed method and apparatus. Also, a multitude of different constituent module names other than those depicted herein might be applied to the various partitions. Additionally, with regard to flow diagrams, operational descriptions and method claims, the order in which the steps are presented herein shall not mandate that various embodiments be

implemented to perform the recited functionality in the same order unless the context dictates otherwise.

Although the method and apparatus is described above in terms of various exemplary embodiments and implementations, it should be understood that the various features, aspects and functionality described in one or more of the individual embodiments are not limited in their applicability to the particular embodiment with which they are described, but instead might be applied, alone or in various combinations, to one or more of the other embodiments of the disclosed method and apparatus, whether or not such embodiments are described and whether or not such features are presented as being a part of a described embodiment. Thus the breadth and scope of the claimed invention should not be limited by any of the above-described embodiments.

Terms and phrases used in this document, and variations thereof, unless otherwise expressly stated, should be construed as open-ended as opposed to limiting. As examples of the foregoing: the term “including” should be read as meaning “including, without limitation” or the like, the term “example” is used to provide exemplary instances of the item in discussion, not an exhaustive or limiting list thereof, the terms “a” or “an” should be read as meaning “at least one,” “one or more,” or the like, and adjectives such as “conventional,” “traditional,” “normal,” “standard,” “known” and terms of similar meaning should not be construed as limiting the item described to a given time period or to an item available as of a given time, but instead should be read to encompass conventional, traditional, normal, or standard technologies that might be available or known now or at any time in the future. Likewise, where this document refers to technologies that would be apparent or known to one of ordinary skill in the art, such technologies encompass those apparent or known to the skilled artisan now or at any time in the future.

The presence of broadening words and phrases such as “one or more,” “at least,” “but not limited to” or other like phrases in some instances shall not be read to mean that the narrower case is intended or required in instances where such broadening phrases might be absent. The use of the term “module” does not imply that the components or functionality described or claimed as part of the module are all configured in a common package. Indeed, any or all of the various components of a module, whether control logic or other components, might be combined in a single package or separately maintained and might further be distributed across multiple locations.

Additionally, the various embodiments set forth herein are described in terms of exemplary block diagrams, flow charts and other illustrations. As will become apparent to one of ordinary skill in the art after reading this document, the

illustrated embodiments and their various alternatives might be implemented without confinement to the illustrated examples. For example, block diagrams and their accompanying description should not be construed as mandating a particular architecture or configuration. All of the claims as originally filed are hereby incorporated into this specification by reference.

The invention claimed is:

1. A method of trimming dried plants comprising:

- obtaining a device featuring:
 - two blades, including a first blade defined by a disk with an annular pattern of openings that includes at least one opening that has a cutting edge; and,
 - a second blade wherein the second blade is underneath to the first blade and features a c-shaped pattern of openings that has at least one opening with a cutting edge;
 - wherein the annular pattern of openings is superimposed on the c-shaped pattern of openings so that rotating the first blade relative to the second blade accomplishes a cutting action between the at least one cutting edge of the at least one opening that is included in the annular pattern of openings of the first blade and the at least one cutting edge of the at least one opening that is included in the c-shaped pattern of openings of the second blade;
 - a container housing the blades; and,
 - a motor positioned under the second blade with a drive shaft through the second blade so that the drive shaft of the motor is connected to the first blade and so that the motor is not directly beneath any one of the openings of the c-shaped pattern of openings of the second blade;
- placing plants to be trimmed on top of the first blade so that extrusions of the plants are provided through the at least one opening that is included in the annular pattern of openings of the first blade;
- turning on the motor so that the motor spins the first blade while the second blade remains stationary, so that a cutting action is accomplished at least between the cutting edge of said at least one opening included in the annular pattern of openings of the first blade and the cutting edge of said at least one opening included in the c-shaped pattern of openings of the second blade whenever said edges intersect during rotation of the first blade relative to the second blade;
- wherein the cutting action trims the extrusions from the plants; and,
- wherein the trimmed extrusions to fall through the at least one opening of the second blade.

* * * * *