

(12) **United States Patent**  
**Artus et al.**

(10) **Patent No.:** **US 9,494,025 B2**  
(45) **Date of Patent:** **Nov. 15, 2016**

(54) **CONTROL FRACTURING IN UNCONVENTIONAL RESERVOIRS**

(71) Applicants: **Vincent Artus**, Houston, TX (US);  
**Chih Chen**, Houston, TX (US)

(72) Inventors: **Vincent Artus**, Houston, TX (US);  
**Chih Chen**, Houston, TX (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 245 days.

3,938,594 A	2/1976	Rhudy	
3,954,627 A	5/1976	Dreher	
4,005,750 A	2/1977	Shuck	
4,022,276 A	5/1977	Dreher	
4,084,640 A	4/1978	Allred	
4,387,770 A	6/1983	Hill	
4,478,282 A	10/1984	Nolte	
4,509,598 A	4/1985	Earl	
4,515,214 A	5/1985	Fitch	
4,548,272 A	10/1985	Norton	
4,564,070 A	1/1986	Norton	
4,610,160 A	9/1986	Christiansen	
4,612,989 A *	9/1986	Rakach	E21B 43/2405 166/263
4,621,522 A	11/1986	Christiansen	
4,627,273 A	12/1986	Christiansen	
4,687,061 A	8/1987	Uhri	
4,688,639 A	8/1987	Falk	
4,714,115 A	12/1987	Uhri	
4,723,605 A	2/1988	Sydansk	
4,733,726 A *	3/1988	Alameddine	E21B 43/2405 166/271
4,744,418 A	5/1988	Sydansk	
4,770,245 A	9/1988	Sydansk	

(21) Appl. No.: **14/195,487**

(22) Filed: **Mar. 3, 2014**

(65) **Prior Publication Data**  
US 2014/0246194 A1 Sep. 4, 2014

**Related U.S. Application Data**

(60) Provisional application No. 61/771,711, filed on Mar. 1, 2013.

(51) **Int. Cl.**  
**E21B 43/26** (2006.01)  
**E21B 43/17** (2006.01)  
**E21B 43/30** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **E21B 43/26** (2013.01); **E21B 43/17** (2013.01); **E21B 43/305** (2013.01)

(58) **Field of Classification Search**  
CPC .. E21B 43/26; E21B 43/305; E21B 43/2405; E21B 43/17; E21B 43/16; E21B 43/2406; E21B 43/30  
USPC ..... 166/271, 52, 370, 266  
See application file for complete search history.

(56) **References Cited**  
**U.S. PATENT DOCUMENTS**

2,753,940 A	7/1956	Bonner
3,700,032 A	10/1972	Terry

(Continued)

**FOREIGN PATENT DOCUMENTS**


WO	WO2008027982	3/2008
WO	WO2011010113	1/2011

*Primary Examiner* — Michael Wills, III  
(74) *Attorney, Agent, or Firm* — Buche & Associates, P.C.; John K. Buche; Scott D. Compton

(57) **ABSTRACT**

The application is related to improving recovery of fracturing fluids from subterranean target earth intervals. The application is also related to improving hydrocarbon productivity of subterranean target earth intervals. The application is also related to controlling the development of fractures in subterranean target earth intervals.

**16 Claims, 11 Drawing Sheets**

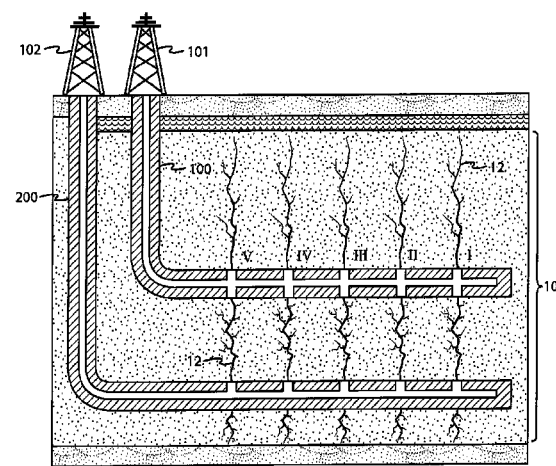


(56)

References Cited

U.S. PATENT DOCUMENTS

4,779,680	A	10/1988	Sydansk	6,938,690	B2	9/2005	Surjaatmadja	
4,844,168	A	7/1989	Sydansk	7,032,671	B2	4/2006	Aud	
4,846,276	A	7/1989	Haines	7,228,906	B2	6/2007	Snider	
4,867,242	A	9/1989	Hart	7,353,866	B2	4/2008	Snider	
4,869,322	A	9/1989	Vogt, Jr.	7,441,603	B2*	10/2008	Kaminsky	E21B 43/2405
4,887,670	A	12/1989	Lord					166/266
4,930,575	A	6/1990	Falk	7,772,162	B2	8/2010	Pope	
4,995,461	A	2/1991	Sydansk	7,855,169	B2	12/2010	Pope	
5,000,264	A	3/1991	Snider	8,043,998	B2	10/2011	Pope	
5,002,431	A	3/1991	Heymans et al.	8,138,127	B2	3/2012	Pope	
5,018,578	A	5/1991	El Rabaa	2002/0033278	A1	3/2002	Reddoch	
5,082,056	A	1/1992	Tackett, Jr.	2006/0200328	A1	9/2006	Guo	
5,111,881	A	5/1992	Soliman	2007/0225176	A1	9/2007	Pope	
5,117,912	A	6/1992	Young	2009/0062155	A1	3/2009	Pope	
5,133,624	A	7/1992	Cahill	2009/0223663	A1	9/2009	Snider	
5,261,489	A*	11/1993	Jennings, Jr.	2009/0223670	A1	9/2009	Snider	
			E21B 43/26	2010/0044041	A1	2/2010	Smith	
			166/271	2010/0137169	A1	6/2010	Pope	
5,318,123	A	6/1994	Venditto	2010/0167964	A1	7/2010	Pope	
5,318,124	A*	6/1994	Ong	2010/0181068	A1	7/2010	Pope	
			E21B 43/2405	2010/0224361	A1	9/2010	Pope	
			166/272.3	2010/0292110	A1	11/2010	Pope	
5,327,971	A	7/1994	Garbutt	2010/0319920	A1	12/2010	Pope	
5,356,565	A	10/1994	Southwell	2011/0017458	A1	1/2011	East	
5,372,195	A	12/1994	Swanson	2011/0136704	A1	6/2011	Sharma	
5,465,790	A	11/1995	McClure	2011/0192591	A1	8/2011	Bahorich	
5,482,116	A	1/1996	El-Rabaa	2011/0198088	A1	8/2011	Caro	
5,495,891	A	3/1996	Sydansk	2011/0201531	A1	8/2011	Sharma	
5,505,074	A	4/1996	Mihcakan	2011/0252878	A1	10/2011	Snider	
5,513,712	A	5/1996	Sydansk	2012/0037373	A1	2/2012	Xu	
5,531,274	A	7/1996	Bienvenu, Jr.	2012/0067582	A1	3/2012	Fincher	
5,598,891	A	2/1997	Snider	2012/0111560	A1	5/2012	Hill	
5,682,951	A	11/1997	Sydansk	2012/0111565	A1	5/2012	Garcia-Lopez De Victoria	
5,706,895	A	1/1998	Sydansk	2012/0111566	A1	5/2012	Sherman	
5,711,376	A	1/1998	Sydansk	2012/0118566	A1	5/2012	Vandor	
5,775,426	A	7/1998	Snider	2012/0118572	A1	5/2012	Hutchins	
6,002,063	A	12/1999	Bilak	2012/0125617	A1	5/2012	Gu	
6,047,773	A	4/2000	Zeltmann	2012/0125618	A1	5/2012	Willberg	
6,082,450	A	7/2000	Snider	2012/0152550	A1	6/2012	East, Jr.	
6,158,511	A	12/2000	Wesson	2012/0175121	A1	7/2012	Veatch	
6,253,851	B1	7/2001	Schroeder, Jr.	2013/0132055	A1*	5/2013	Preux	E21B 43/00
6,263,283	B1	7/2001	Snider					703/10
6,336,506	B2	1/2002	Wesson	2013/0199780	A1*	8/2013	Scott	E21B 43/16
6,386,288	B1	5/2002	Snider					166/268
6,761,219	B2	7/2004	Snider					

\* cited by examiner

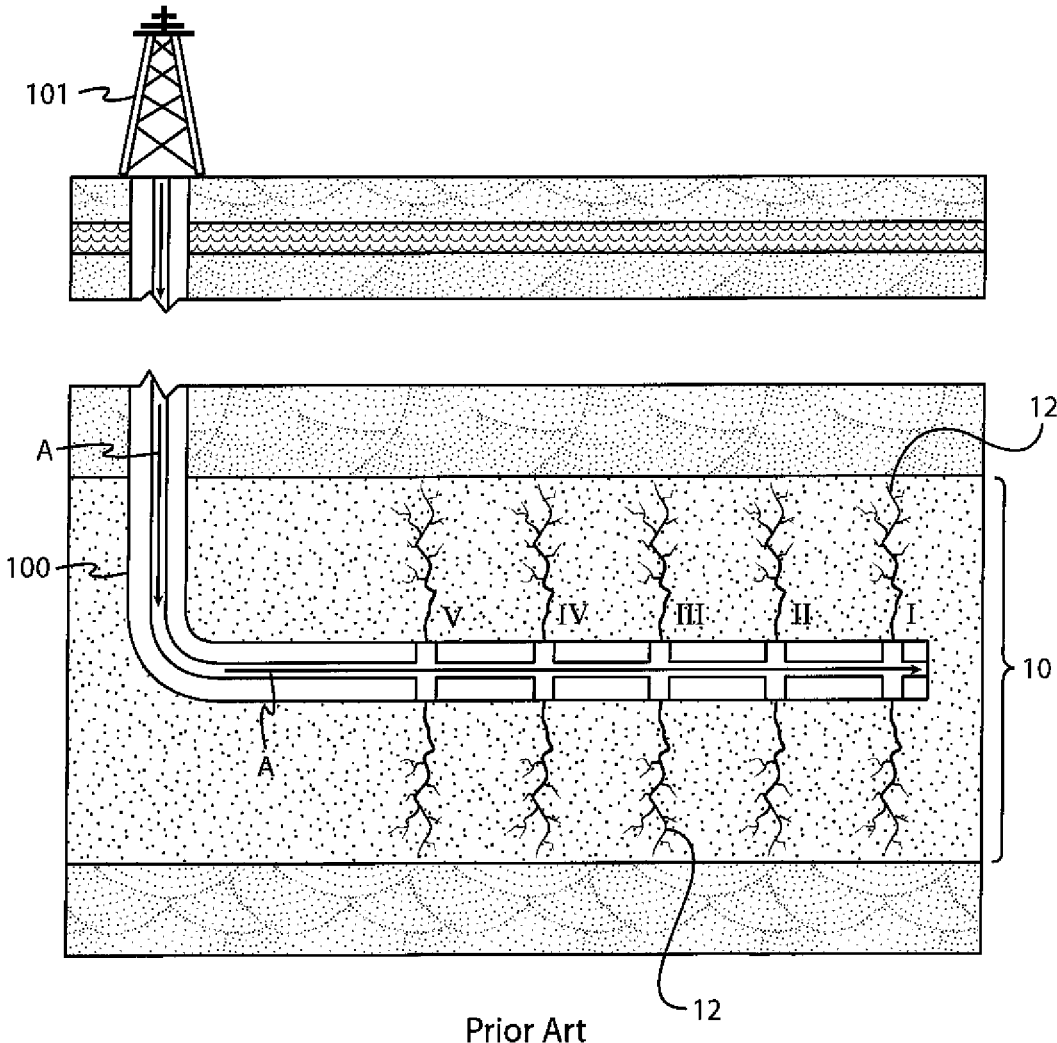

Prior Art

FIG. 1

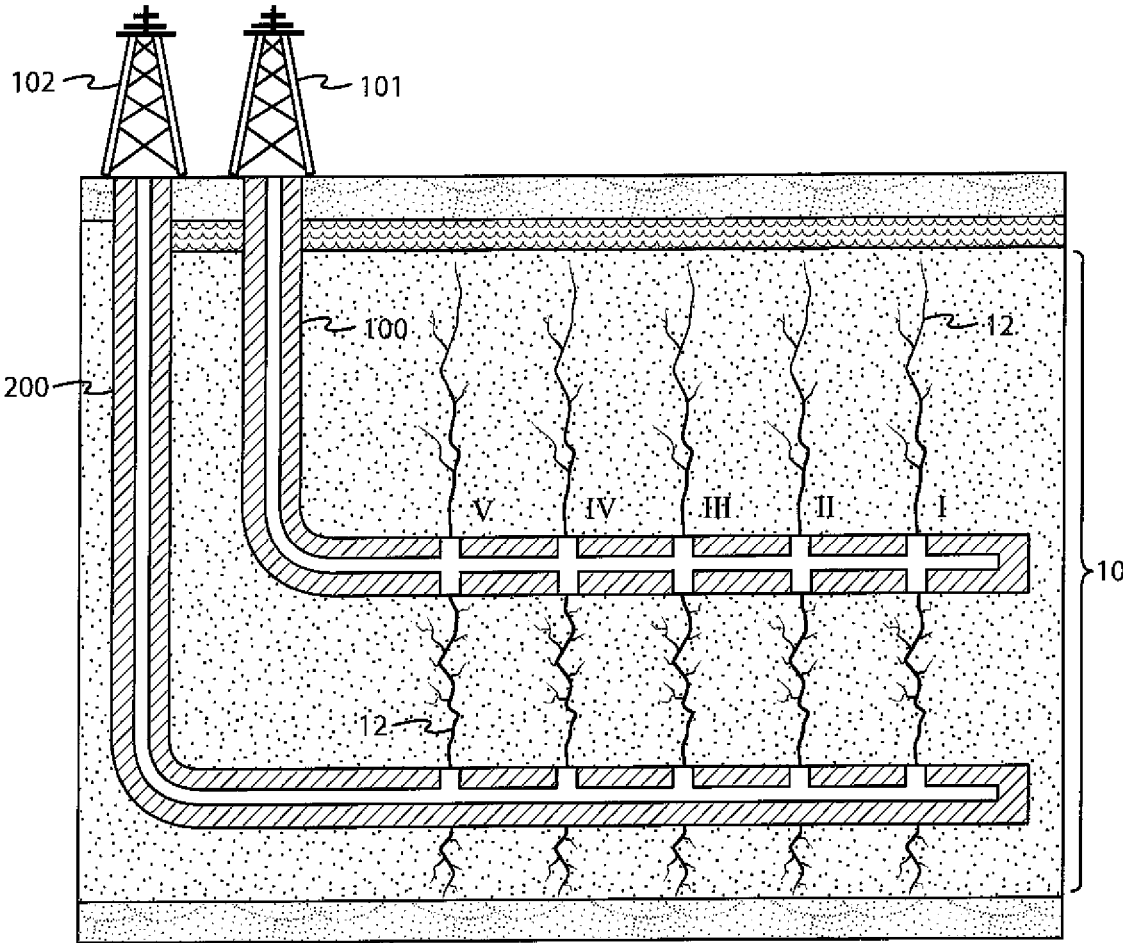


FIG. 2

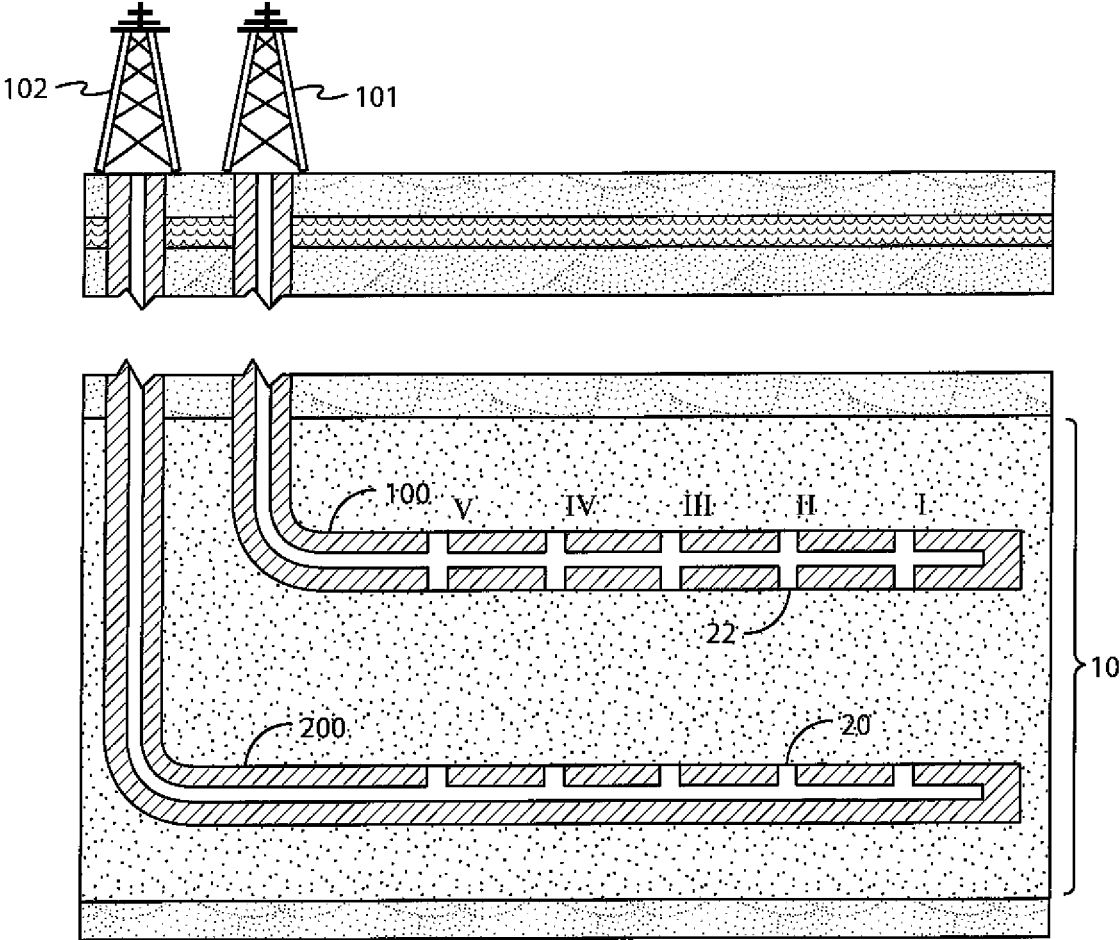


FIG. 3

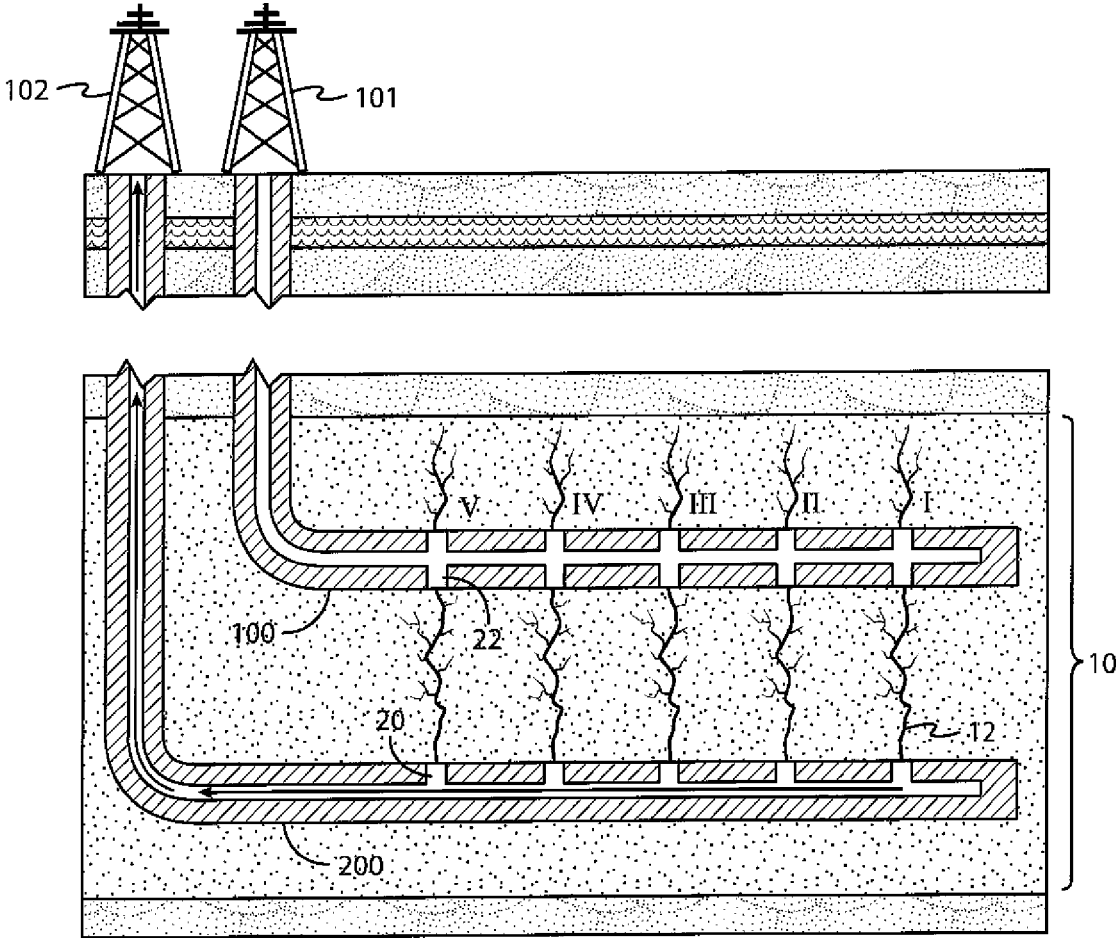


FIG. 4

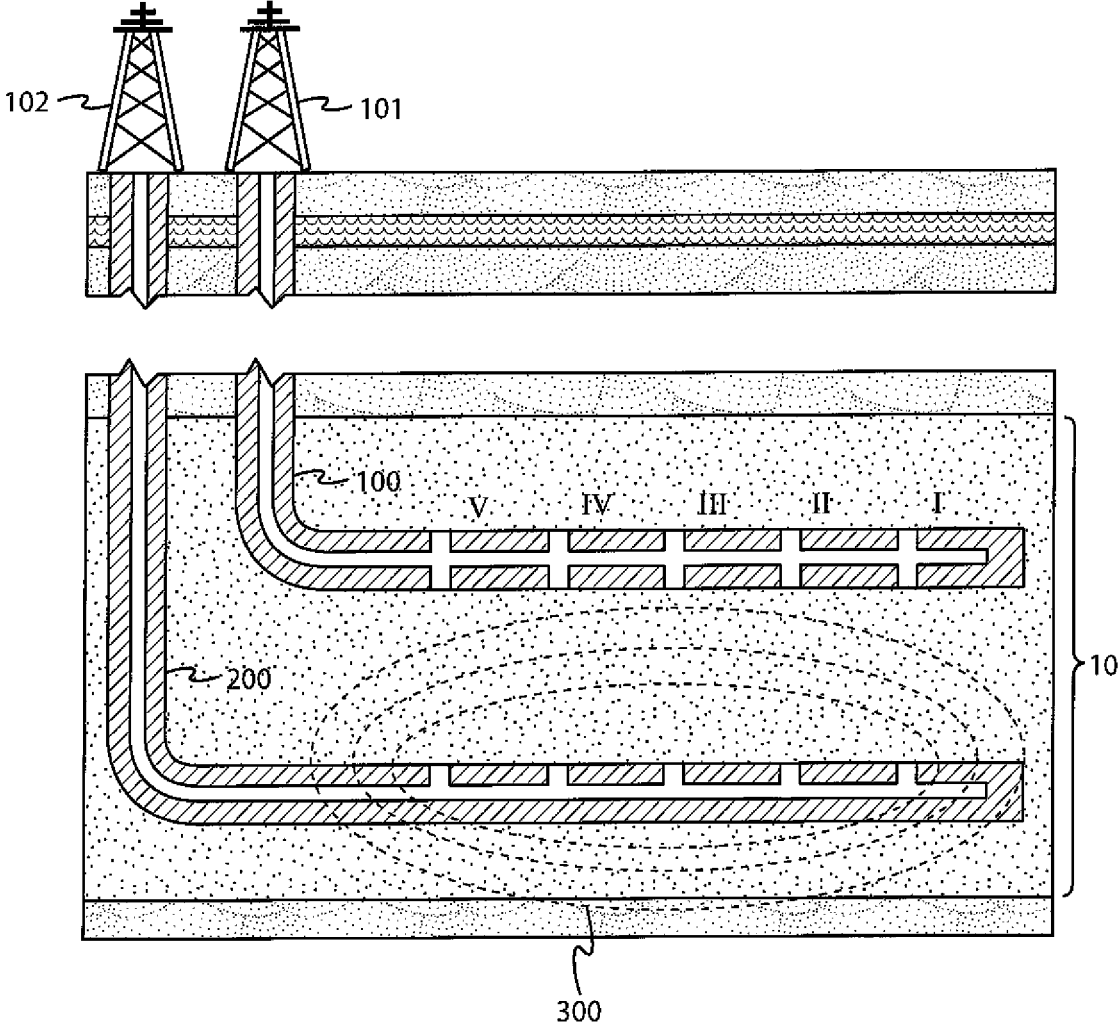


FIG. 5

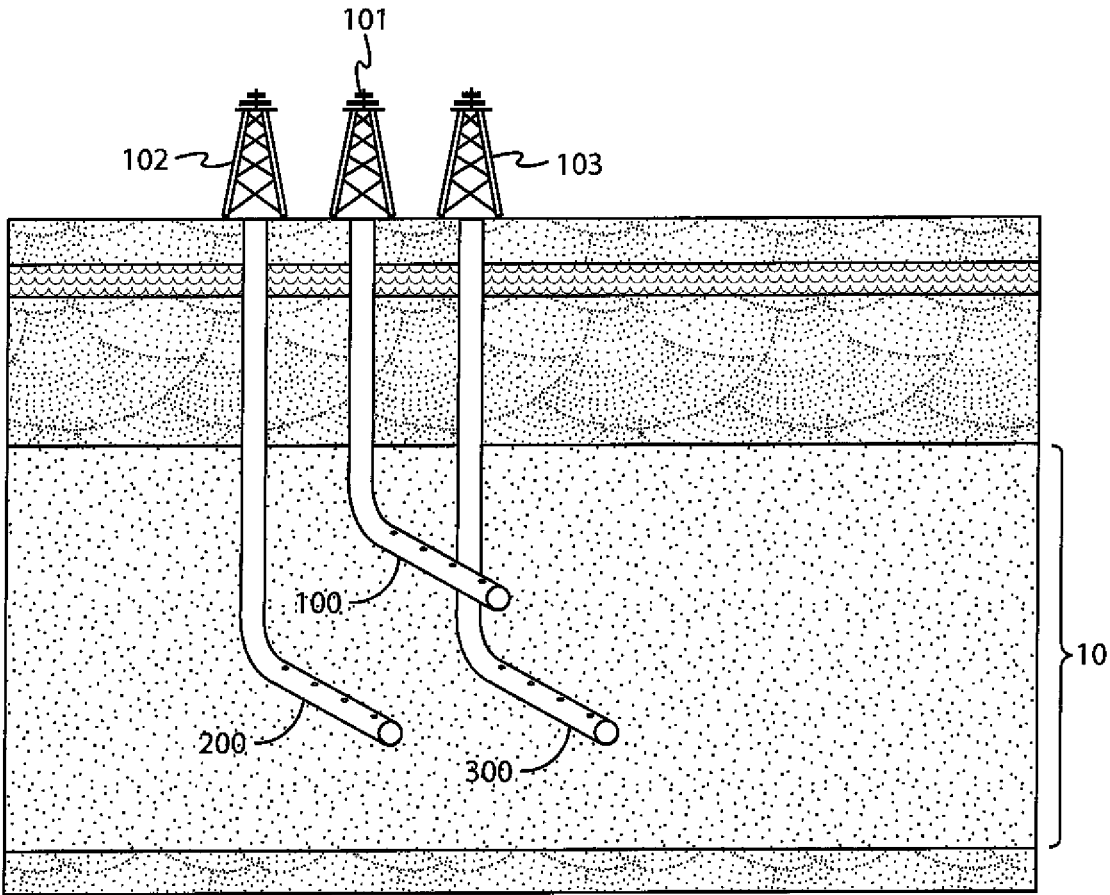


FIG. 6



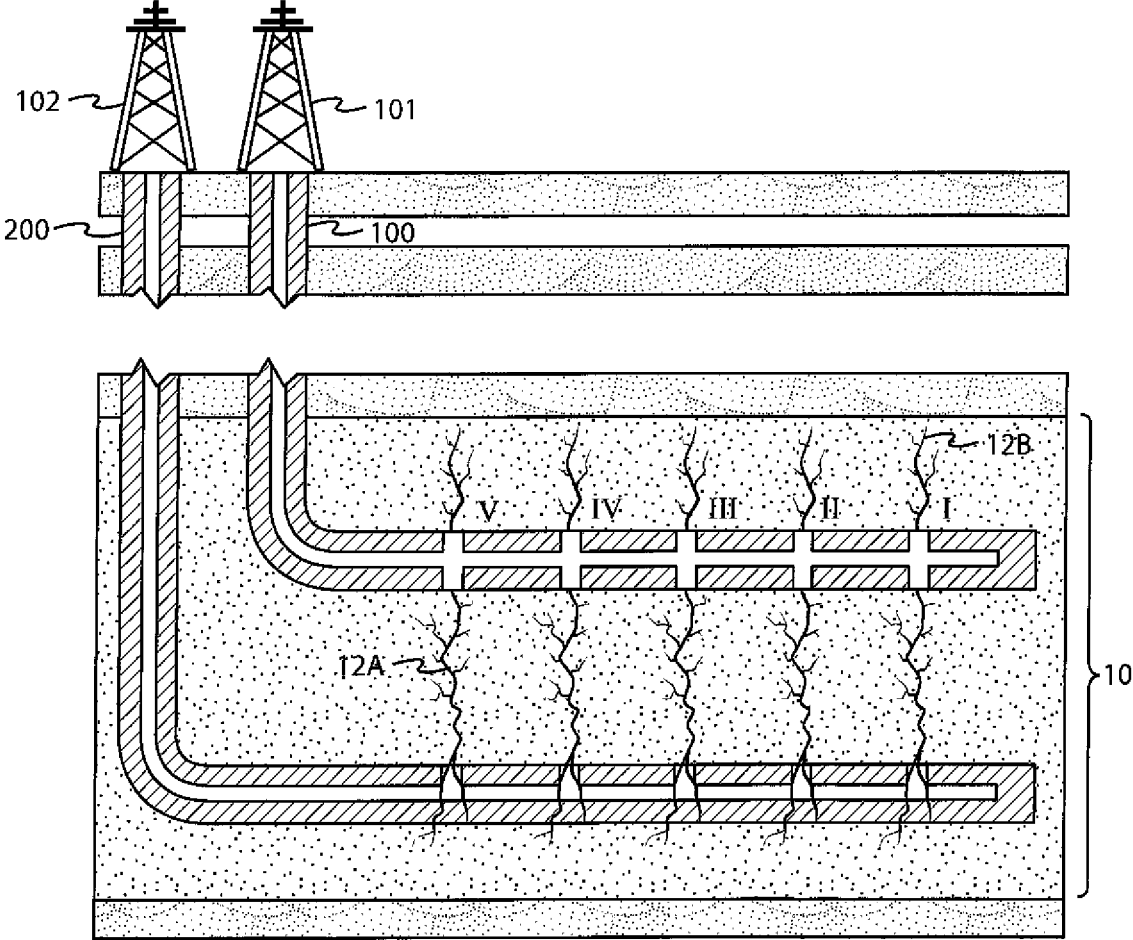


FIG. 7

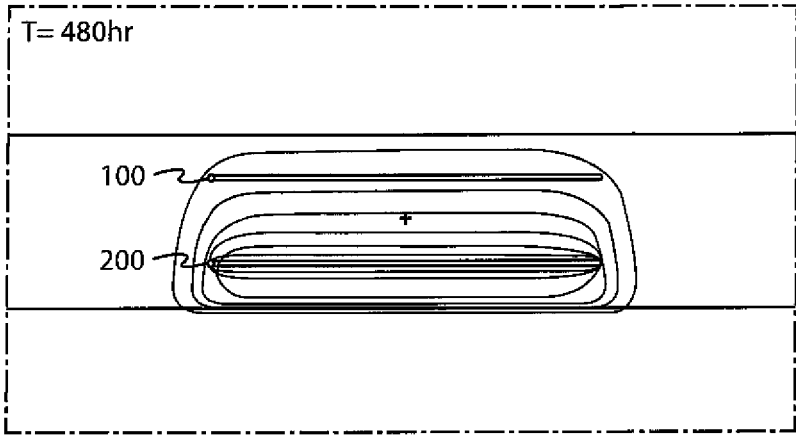


FIG. 8A

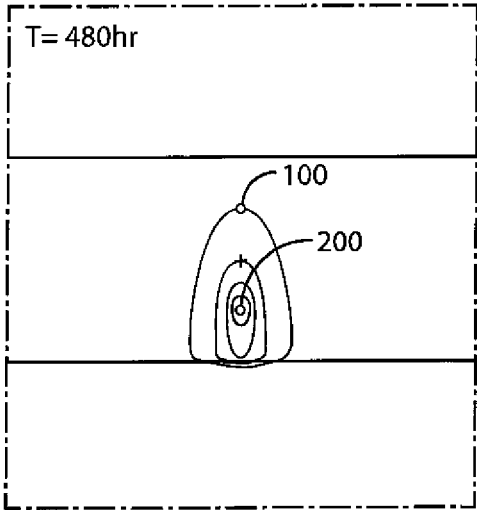


FIG. 8B

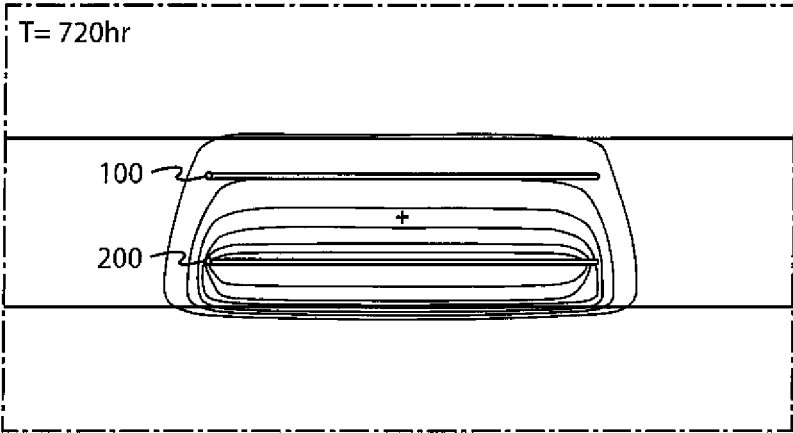


FIG. 9A

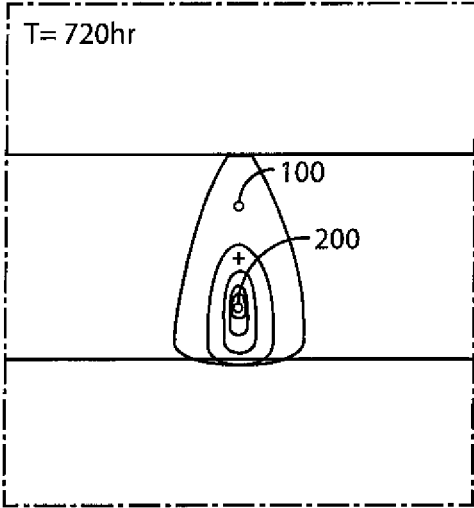


FIG. 9B

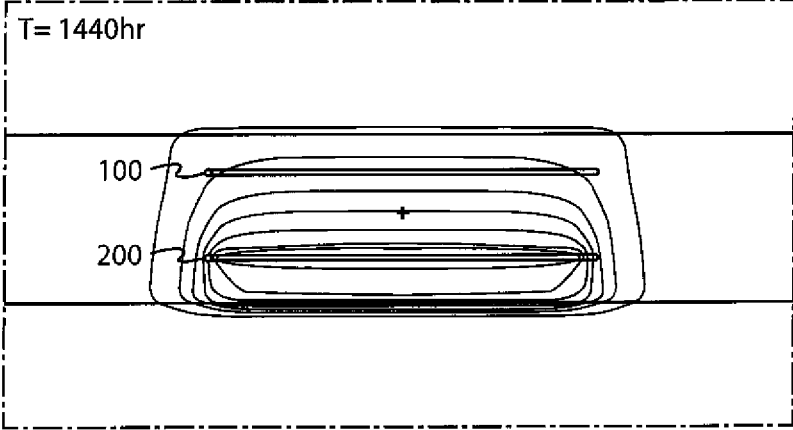


FIG. 10A

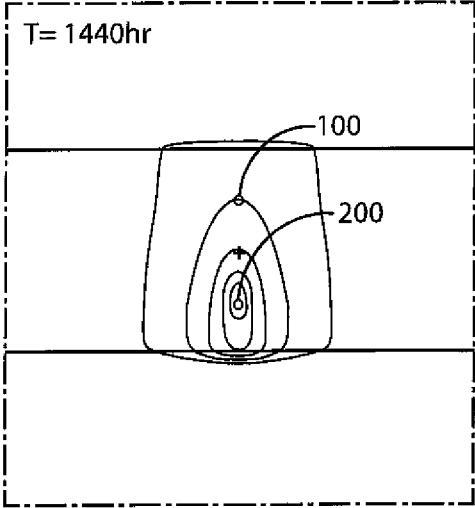


FIG. 10B

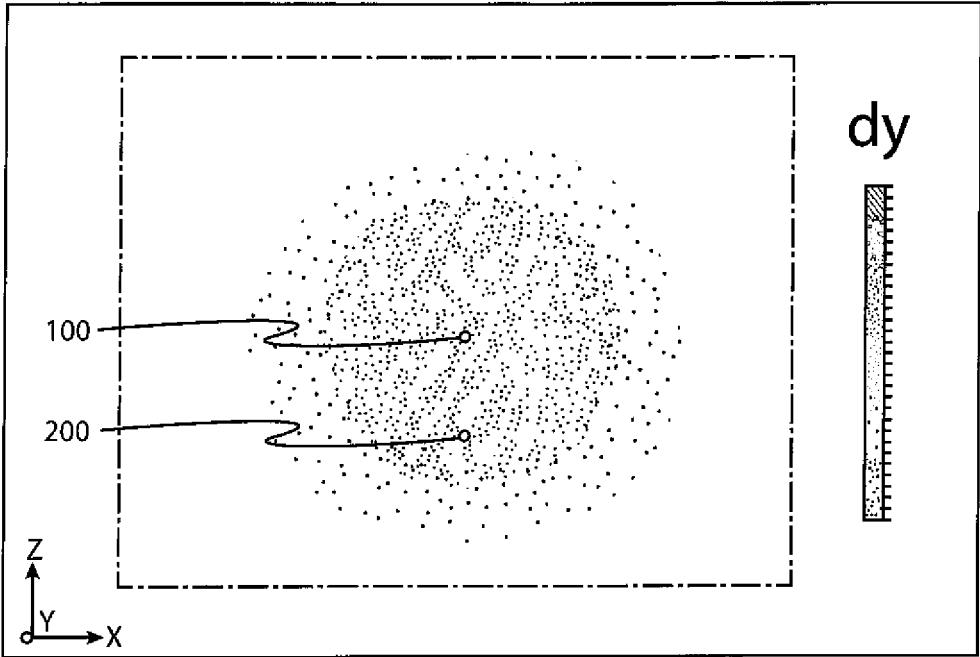


FIG. 11

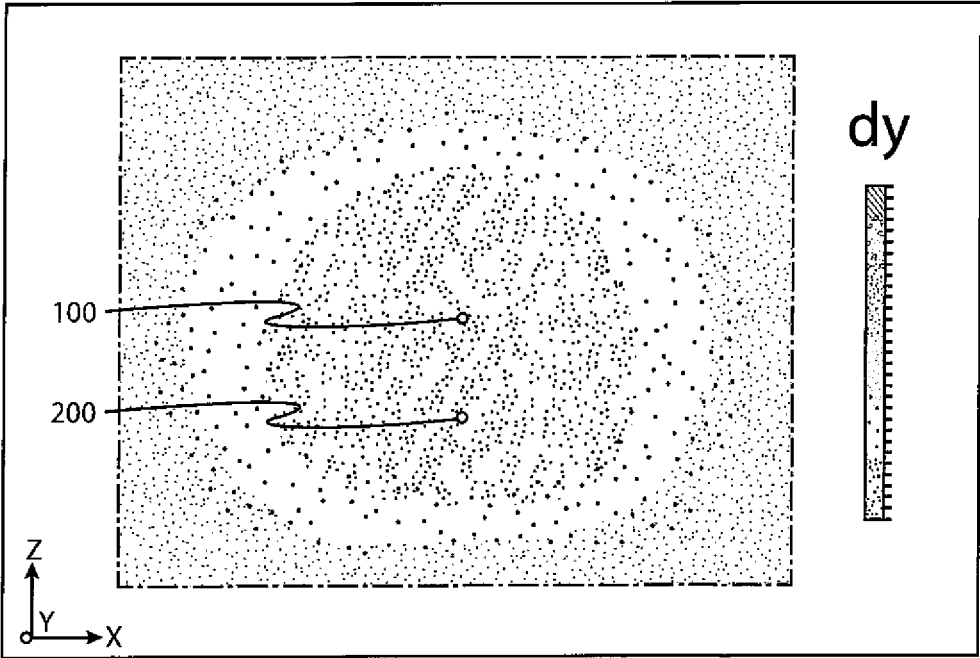


FIG. 12

1

## CONTROL FRACTURING IN UNCONVENTIONAL RESERVOIRS

### CROSS-REFERENCE TO RELATED APPLICATIONS

The application is entitled to the benefit of the filing date of the prior-filed provisional application No. 61/771,711, filed on Mar. 1, 2013.

### STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

Not applicable.

### FIELD OF THE APPLICATION

The application relates generally to the field of hydraulic fracturing of reservoir rock formations.

### BACKGROUND

Considerable volumes of hydrocarbons are currently stored in natural subterranean earth intervals in porous formations of extremely low permeability, many of which are thousands of feet beneath the earth's surface. Such are generally termed "unconventional reservoirs" and may include tight (gas or oil) reservoirs, shale gas, shale oil, or coalbed methane ("CBM") reservoirs. Unconventional reservoirs are typically stimulated for efficient or effective production.

One method of stimulating unconventional reservoirs is accomplished via hydraulic fracturing (or "fracking" or "hydrofracking" as the terms are understood by persons of ordinary skill in the art of drilling operations). Generally, fracking includes drilling a deviated well into an interval, and creating one or more hydraulic transverse fractures in the interval along the well. Once fracturing is achieved, the well may be put on production.

A problem encountered in fracking unconventional reservoirs includes the fast depletion of a completed well. Various factors contribute to this problem. One factor includes the original in-situ stress of an interval, which typically dictates fracture development making the fracturing process difficult to control. For example, induced fractures tend to propagate along the minimum stress direction of a target interval, meaning that fractures may propagate upward and perforate geological layers above a targeted interval resulting in a loss of stimulation efficiency of the interval and/or possible leakage of hydrocarbons and/or fracturing fluids into upper non-targeted interval(s). Another factor includes the low recovery of fracturing fluids injected into an interval, i.e., the low flow back ratio of fracturing fluid injected into an interval. Depending on the permeability, porosity, fluid viscosity and fracturing pressure of an interval, some of the injected fracturing fluid may remain in the fractured network of the interval resulting in less than fifty percent (<50%) recovery of the fracturing fluids. The unrecovered fracturing fluids may plug up the interval lowering the surface availability for hydrocarbon production.

Improved productivity of hydraulically fractured deviated wells is desired.

### SUMMARY

The present application is related to a method of improving productivity of a primary deviated well in a subterranean

2

target earth interval, comprising (1) installing a secondary deviated well in the target earth interval substantially laterally aligned with the primary deviated well, the primary deviated well defining a first perforated interval, the secondary deviated well being located at a depth greater than the primary deviated well, the secondary deviated well defining a second perforated interval; (2) fracturing the target earth interval by delivering one or more fracturing fluids into the interval via the primary deviated well; and (3) recovering the one or more fracturing fluids via the primary and secondary deviated wells.

The present application is also related to a method of improving hydrocarbon productivity of a subterranean target earth interval, comprising (1) providing a first deviated well at a first depth within the target earth interval and a second deviated well at a second depth, the second depth being greater than the first depth; (2) injecting pressurized fluid into the second deviated well in a manner effective to modify stress conditions of the target earth interval between the first and second wells; and (3) injecting one or more fracturing fluids into the first deviated well whereby the stress of the target earth interval influences fracture propagation toward the second deviated well.

The present application is also related to a system for fracturing a subterranean target earth formation, including (1) a fracture inducing assembly deliverable to a first location in a target earth formation and operationally configured to induce fractures in the target earth formation; and (2) a pressure inducing assembly deliverable to a second location in the target earth formation and operationally configured to pressurize the target earth formation in a manner effective to induce selective fracture formation from the fracture inducing assembly directionally toward the pressure inducing assembly.

### BRIEF DESCRIPTION OF THE FIGURES

FIG. 1 is a simplified illustration of a fracking technique using a deviated well within a target interval.

FIG. 2 is a simplified illustration of a fracking technique using a second deviated well at a depth below a first deviated well.

FIG. 3 is a simplified illustration of dual deviated wells installed within a target interval illustrating staged perforations along each of the wells.

FIG. 4 is a simplified illustration of the dual deviated wells of FIG. 3 illustrating a fracture network above the lowermost deviated well.

FIG. 5 is a simplified illustration of dual deviated wells installed within a target interval including a lowermost well for inducing pressure rise within the target interval.

FIG. 6 is a simplified illustration of a multi-well system of the application.

FIG. 7 is a simplified illustration of dual deviated wells installed within a target interval illustrating a large volume fracture network between the wells.

FIG. 8A is a first view of a simplified illustration of a computer simulation according to the present invention.

FIG. 8B is a second view of the computer simulation of FIG. 8A.

FIG. 9A is a first view of another simplified illustration of a computer simulation according to the present invention.

FIG. 9B is a second view of the computer simulation of FIG. 9A.

FIG. 10A is a first view of still another simplified illustration of a computer simulation according to the present invention.

FIG. 10B is a second view of the computer simulation of FIG. 10A.

FIG. 11 is a view of computer simulation fracturization operation results according to the present invention.

FIG. 12 is a view of computer simulation fracturization operation results according to the present invention.

### BRIEF DESCRIPTION

Before describing the invention in detail, it is to be understood that the present system and method are not limited to particular embodiments. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only, and is not intended to be limiting. As used in this specification and the appended claims, the term "subterranean earth interval" "reservoir interval" or "interval" refers to a subterranean lithologic layer, amongst several layers or intervals, each having a variety of petrophysical properties and initial reservoir conditions such as variations in permeability and initial formation pressures. The term "minifrac," as understood by persons of ordinary skill in the art of drilling, refers to an injection-falloff diagnostic test performed without proppant before a main fracture stimulation treatment. A minifrac typically involves a small-volume, low-flow-rate hydraulic fracturing test performed in an interval to determine the hydraulic fracturing parameters necessary for fracture stimulation of an interval including, but not necessarily limited to: (1) Fracture closure pressure, (2) Instantaneous shut-in pressure ("ISIP"), wherein [ISIP=Final Flow Pressure-Final Flow Friction], (3) Fracture gradient, wherein [Fracture Gradient=ISIP/Formation Depth], (4) Net Fracture Pressure ( $\Delta p_{net}$ ), wherein [ $\Delta p_{net}$ =ISIP-Closure Pressure], (5) Fluid efficiency, which is the ratio of the stored volume within the fracture to the total fluid injected, (6) Formation leakoff characteristics and fluid loss coefficients, (7) Formation permeability and (8) Reservoir pressure.

The phrase "deviated well" refers to a well that is varied from the true vertical and may include a horizontal well as the phrase is understood by persons of ordinary skill in the art. The phrase "in situ stress" refers to the local forces acting on a lithologic layer in the subsurface. Herein, "fracture gradient" (also referred to as "pressure gradient") is defined as the pressure increase per unit of the depth in a subterranean earth interval due to the density of the interval (measured in pounds per square inch per foot and/or bars per meter). The phrases "fracturing fluid," "fracture fluid," and "fracking fluid" suitably refer to fluid injected into an interval under high pressure to form fractures, cracks or fissures in the interval to allow hydrocarbon based fluids to move freely from interval pores where trapped. Herein, fractures forming an interconnected network of fractures may be referred to as a "fracture network." The phrase "fracture optimization" refers to fracturing of a target interval in a manner effective to maximize recovery of one or more fluids from the interval. Often, fracture optimization may include fracturing that is strong enough to penetrate a target interval and yet weak enough not to break into other non-target intervals. Also, fracture optimization may include the design of the fracking (number of fractures, orientation, choice of fracking sequence) in such a way that the geometry of the created fracture network is more complex, i.e., the surface available for flow inside fractures is maximized. The depth of penetration and aperture size of fractures refers to the "extent" of a fracture network. The phrase "stress anisotropy" refers to the difference in magnitude between a maximum horizontal stress and a minimum horizontal stress

of a subterranean interval. As understood by persons of ordinary skill in the art of drilling, suitable fracturing fluids may be gel, foam or water-based fracturing fluids including fluids mixed with friction-reducing additives (often referred to as "slickwater"). Examples include, but are not necessarily limited to high viscosity liquids, oil and water dispersions, oil and water emulsions, water, and combinations thereof. A "proppant" refers to a material operationally configured to keep an induced hydraulic fracture open, during or following a fracturing treatment of an interval. Suitable proppants include, but are not necessarily limited to materials such as grains of sand, bauxite, ceramics, or other particulates that prevent fractures from closing once the injection of fracturing fluids into a target interval is stopped and the pressure of the fracturing fluid in the target interval is reduced. The phrase "formation fluid" may refer to hydrocarbon based fluids such as gas and oil, salt water, fresh water, fracturing fluids, and combinations thereof. The phrase "well production" and variants thereof refers to the recovery of one or more flowable fluids located in a subterranean earth interval.

In one aspect, the application provides a system and method for increasing the productivity of hydraulically fractured horizontal wells in unconventional reservoir intervals by controlling the development of fractures in the interval and/or improving flow back of fracturing fluid from the interval.

In another aspect, the application provides a system and method for increasing or otherwise improving the productivity of deviated wells in unconventional subterranean earth reservoir intervals.

In another aspect, the application provides a system and method for fracturing a subterranean earth reservoir interval to facilitate the recovery of subterranean resources including, but not necessarily limited to energy resources such as hydrocarbon based fluids like oil and gas.

In another aspect, the application provides a system and method for modifying the effective stress in a subterranean earth reservoir interval in order to control fracture formation in the interval for improving and/or increasing the efficiency of hydrocarbon based fluid recovery from the interval.

In another aspect, the application provides a system and method for controlling the fracturing process and the flow-back of fracturing fluid(s) in a subterranean earth reservoir interval using a primary well for injecting fracturing fluid(s) into an interval at a first location and a secondary deviated well for controlling or modifying the effective stress of the interval and capturing the fracturing fluid(s). Suitably, pressurized fluid is deliverable to an interval at a second location via the second deviated well. Modifying the effective stress helps control the fracture development. It is the location and/or orientation and/or position of the secondary well (located below the primary well) that assists the recovery of fluids via gravity effects as explained further in this application.

In another aspect, the application provides a system and method for controlling the fracturing process and the flow-back of fracturing fluid(s) in a subterranean earth reservoir interval using a primary well for injecting fracturing fluid(s) into an interval and a secondary deviated well for inducing fracture formation toward the secondary deviated well.

In another aspect, the application provides a system and method for improving the productivity of deviated wells in liquid rich subterranean earth reservoir intervals using a first deviated well to produce gas from the interval and a second deviated well to produce liquid(s) from the interval. Because oil or gas condensate may naturally accumulate near the

5

bottom of an interval due to gravity, the second deviated well may be located at a depth greater than the first deviated well.

In another aspect, the application provides a system and method for recovering fracturing fluid from a fracture network of a subterranean earth reservoir interval located below the wellbore used for fracking operations.

In another aspect, the application provides a system for redistributing the stress in a subterranean earth reservoir interval to control fracture propagation and fracture volume therein.

In another aspect, the application provides a method of analyzing reservoir interval data for the implementation of multi-well systems for increasing productivity of hydraulically fractured intervals.

In another aspect, the application provides simulation methodology operationally configured to assist in the implementation of multi-well systems for increasing productivity of hydraulically fractured intervals.

In another aspect, the application provides a system and method for well stimulation to increase production by improving the flow of hydrocarbons from the drainage area of a reservoir interval into a secondary well bore.

In another aspect, the application provides a multi-well system and method for correcting the stress in a subterranean earth reservoir interval to control fracture formation in the interval. The direction of the corrected stress will be such that fractures initiated at a primary well will tend to propagate downward toward a secondary well in the vicinity of the fractured well. The multi-well system does not prevent fractures to expand laterally as in a classical fracturing job. After a fracturing operation has completed, the secondary well may be put on production, first to recover the fracturing fluids lying in the stimulated fracture network, and/or to assist the primary well during production as desired.

In another aspect, the application provides a multi-well system and method for correcting the stress in a subterranean earth reservoir interval to control the propagation of the fracture and the injection fluids to reduce the possible perforation of non-target intervals, aquifers and other non-target subterranean formations. Computer programs and/or simulation techniques may also be employed to help determine the optimum fracture penetration geometry and optimum fracture conductivity for a target interval for controlling fracture propagation.

#### DISCUSSION OF THE INVENTION

The producibility of hydrocarbons typically depends on the permeability of the rock formation of the target interval. Where permeability is low, fracturing operations may be employed to increase the fracture surface area of a target interval, i.e., create additional flow paths so that hydrocarbons, such as oil and gas, may flow more easily through the rock formation for retrieval purposes. Known fracking techniques typically involve the installation of a deviated well (such as a horizontal well) laterally a desired distance along a target interval followed by pumping fracturing fluid under pressure into the interval to form a fracture network therein. Depending on the size of the interval to be produced, it is not uncommon for a deviated well to be drilled laterally into a target interval up to about 1524.0 meters or more (up to about 5,000 feet or more), whereby up to about 23.0 million liters (6.0 million gallons) may be pumped into the interval to form a desired fracture network.

Often, the pressure build-up in a target interval is achieved in stages along the length of a deviated well by

6

isolating portions of the well. In staged fracturization, a deviated well is suitably fractured sequentially beginning at the stage nearest the distal end of a well, moving uphole as each stage of the fracking treatment is completed until the entire deviated well has been stimulated. A simplified staged fracturing technique is illustrated in FIG. 1. As shown, fracturing fluid may be pumped (see directional arrow "A") through a subterranean deviated well **100** from a surface location **101** into a target interval **10** in successive stages (I-V) at a rate sufficient to increase pressure beyond the pressure gradient of the target interval **10**. In other words, the fracturing fluid pressurizes the target interval **10** to a point where the in-situ stress levels surrounding the well **100** reach a critical breaking strength so as to initiate fractures **12** (also commonly referred to as "fissures"). Once the target interval **10** begins to fracture, the fracturing fluid continues to travel further into the target interval **10** away from the well **100** forming a fracture network **12**. As understood by the skilled artisan, when a fracturing process is deemed to be completed, pressure is released at the deviated well **100** to promote the flow back of the fracturing fluid back up through the deviated well **100**.

As understood by persons of ordinary skill in the art, fractures **12** typically propagate in opposite directions from a well **100** as shown in FIG. 1. Moreover, fractures **12** typically form in the direction perpendicular to the least stress in a bi-wing configuration as shown in FIG. 1. At depths less than about 610.0 meters (about 2000 feet) horizontal fractures are typically formed due to the Earth's overburden stress at such depths providing the least in-situ stress. As depth increases beyond about 610.0 meters (about 2000 feet), overburden stress increases by about 22.6 kPa/m (about 1.0 psi/ft) making the overburden stress the dominant stress, meaning the horizontal confining stress is now the least principal stress. Since hydraulically induced fractures are formed in the direction perpendicular to the least stress, the resulting fractures at depths greater than about 610.0 meters (about 2000 feet) are typically oriented in the vertical direction as shown in FIG. 1. Where a fracture crosses over a boundary where the principal stress direction changes, the fracture will attempt to reorient itself perpendicular to the direction of least stress. For example, if a fracture propagates from a deeper to shallower interval the fracture may reorient itself from a vertical to a horizontal pathway and spread sideways along the bedding planes of the rock strata of the interval.

For the purposes of this application, fracture optimization may include the intentional propagation of fractures **12** beyond a target interval **10**. However, in most instances, fracture optimization suitably refers to maintaining fracture propagation within the uppermost and lowermost edges or borders of a target interval **10** as shown in FIG. 1. By controlling fracture propagation, operators save time and money related to both material costs and operational expenditures otherwise endured in the presence of undesired fracture networks **12**. The present invention provides a new and desirable approach in this regard. Another benefit is that environmental hazards are reduced, since controlling the fracture propagation reduces the risk of perforating shallower formations, intervals or layers, e.g., an aquifer. Thus, the risk of releasing undesired fracturation fluids in non-target intervals is reduced according to the teachings of the present invention.

Prior to drilling a deviated well, it is important for operators to characterize a target interval in an attempt to predict how the interval will respond to the injection of fracturing fluid and proppant therein. Suitably, knowledge of



one or more formation characteristics including in-situ properties (or in-situ stress conditions) may be used by operators to help determine fracture penetration geometry and fracture conductivity for a target interval. Exemplary in-situ properties include, but are not necessarily limited to (1) the stress regimes affecting the stress anisotropy of a target interval, (2) the stress anisotropy of a target interval, (3) the presence, degree, and/or orientation of any natural fractures in a target interval (which may affect how a fracture forms in a target interval), (4) the mechanical properties of a target interval (to determine the “brittleness” of a target interval), (5) the permeability of a target interval, (6) the closure pressure (which is often the minimal horizontal stress), and combinations thereof. In-situ properties may be ascertained using down hole well log analysis or surveys, e.g., open hole logs, core data, offset well data, and cased hole logs, from which formation lithologies and mechanical rock properties (such as formation Poisson’s Ratios and Young’s Moduli) can be interpreted to help estimate the stimulated reservoir volume (“SRV”) of an interval and the identity of any faults that may cause unintended negative effects during fracking operations.

In addition to performing a formation evaluation to ascertain various formation characteristics, simulation techniques may also be employed to help determine the optimum fracture penetration geometry and optimum fracture conductivity for a target interval. For example, numerical simulations may be employed to determine (1) the optimum wellbore stage size and/or design, (2) the optimum distance between perforation clusters for each fracture stage, (3) the optimum number of perforation clusters for each fracture stage, (4) the optimum number of perforations per cluster, (5) the optimum length of perforated intervals, (6) the optimum location to place clusters, (7) the optimum volume of fracturing fluid to be pumped into the target interval, (8) optimum proppant mass, (9) the injection rate of the fracturing fluid, and combinations thereof as each of the above is understood by the skilled artisan. Suitable simulation techniques may include, but are not necessarily limited to modeling, microseismic fracture mapping (or “microseismic monitoring”), tilt-meter analysis, and combinations thereof.

One or more of the above described parameters may be employed as part of the present invention for increasing the productivity of hydraulically fractured horizontal wells in unconventional reservoir intervals by controlling the development of fractures in the interval and/or improving flow back of fracturing fluid from the interval.

#### Improved Flow Back Ratio of Fracturing Fluid

As understood by those of ordinary skill in the field of fracking, operators typically try to maintain “fracture width” or slow fracture decline by introducing into the injected fracturing fluid one or more proppants operationally configured to prevent fractures **12** from closing. Propped fractures are meant to be permeable enough to allow formation fluids and fracturing fluid to flow through the fractures **12** into a well **100** for recovery. Yet, in known fracturing operations (as depicted in FIG. **1**) an amount of the fracturing fluid unfortunately remains in the induced fractures **12** and connected fissures unrecovered—up to about 50.0 percent or more of fracturing fluid is not uncommon. For example, in an instance where the volume of fracturing fluid pumped into a target interval **10** is about 15,141.60 kL (about 4.0 million gallons), about 7,500 kL (about 2.0 gallons) or more of the fracturing fluid may remain in the fractured network unrecovered. Due to gravity, a majority of the unrecovered

fracturing fluid is typically located in those fractures **12** located below the well **100** (see FIG. **1**). Unrecovered fracturing fluid may plug the target interval **10** below the well **100** resulting in lower than desired hydrocarbon productivity.

To improve the flow back ratio of fracturing fluid injected into a target interval **10**, this application provides for a second deviated well **200** that may be installed at a depth below a first deviated fracturing well **100** to assist in recovery of fracturing fluid (see FIG. **2**). In one suitable embodiment, a second deviated well **200** may be installed below a pre-existing first deviated well **100** following fracking operations. In another suitable embodiment, dual deviated wells **100**, **200** may be installed concurrently prior to fracking operations to improve the flow back ratio of fracturing fluid (see FIGS. **3** and **4**). In another suitable embodiment, a second deviated well **200** may be installed prior to a first deviated well fracturing well **100**.

In the embodiment of FIGS. **3** and **4**, a first deviated well **100** operationally configured to deliver or otherwise inject fracturing fluid into a target interval **10** is suitably drilled to a first depth within a target interval **10**. A second deviated well **200** operationally configured to capture or otherwise recover fracturing fluid and hydrocarbon based fluid from the target interval **10** is suitably drilled to a second depth within the target interval **10**—a depth determined according to the one or more in-situ characteristics of the target interval **10** whereby the second deviated well **200** engages at least part of the fractured network **12** propagating from the first deviated well **100** as depicted in the simplified illustration of FIG. **4**. In one embodiment, the second deviated well **200** may be installed after fracking operations have commenced whereby the depth of the second deviated well **200** may be determined according to post-fracking in-situ characteristics of the target interval **10**. In another embodiment, the second deviated well **200** may be installed prior to fracking operations whereby the depth of the second deviated well **200** may be determined according to pre-fracking in-situ characteristics of the target interval **10**.

As shown, a second deviated well **200** is suitably installed in substantial alignment with the first deviated well **100** in a manner effective to maximize the capture and recovery of fracturing fluid injected into the target interval **10** via the first deviated well **100**. In one suitable embodiment, the perforated interval of the second deviated well **200** is about equal to or greater than the perforated interval of the first deviated well **100**. For example, in an embodiment where the deviated wells **100**, **200** are horizontal wells, the second deviated well **200** suitably lies in substantially parallel alignment with the first deviated well **100** at a length about equal to or greater than the length of the first deviated well **100**. At a minimum, the second deviated well **200** suitably lies in substantially parallel alignment with the first deviated well **100** at a length effective for recovery of fracturing fluid injected into the target interval **10** at the distal stage, e.g., Stage I, of the first deviated well **100**. In one suitable embodiment, the length of the second deviated well **200** engages substantially all of the fracture network **12**.

In one embodiment involving staged fracturing, a second deviated well **200** suitably includes one or more openings disposed along the length of the second deviated well **200**, e.g., perforations **20** disposed along the length of the second deviated well **200** as desired for capturing fracturing fluid delivered by the first deviated well **100**. In another embodiment using staged fracturing, perforations **20** may be disposed along the length of the second deviated well **200** in a manner corresponding to perforations **22** disposed along the

first deviated well **100** (see FIG. 3). In another embodiment, the second deviated well **200** may include an open hole lengthwise along the well **200**. In another embodiment, the second deviated well **200** may include more perforations than the first deviated **100**. Although the system of the present application may be built to scale, in most fracking operations as performed on the continent of North America, perforations **20** of the second deviated well **200** may have a width (or diameter) up to about 0.00635 meters (about 0.017 feet). Without limiting the invention, fracturing stages are typically set apart along a wellbore from about 60.0 meters to about 150.0 meters (from about 200.0 feet to about 500.0 feet).

In use, once fracturing operations are completed the first and second deviated wells **100**, **200** may act in concert to recover fracturing fluid and hydrocarbon based fluids from a target interval **10**. Depending on one or more in-situ properties of a target interval **10**, the addition of a second deviated well **200** suitably increases recovery of fracturing fluid from a target interval **10** by up to about 50.0 percent or more and increases hydrocarbon based fluid production up to about 90.0 percent or more compared to use of a single deviated well **100** alone. For example, in an embodiment where the recovery of fracturing fluid from a target interval **10** increases by about 30.0% productivity of the target interval **10** may increase by about 30.0%. Thus, for the purposes of this application a direct correlation may exist between improved fracturing fluid recovery and improved well production when incorporating a multi-well system for recovery of fracturing fluid.

#### Control Fracturing and Production Optimization

In addition to improving the flow back ratio of fracturing fluid, it has also been realized that a second deviated well **200** may be used to pressurize or stimulate a target interval **10** prior to and/or during hydraulic fracturing to modify the in-situ stress of the target interval **10** in the vicinity of a first deviated well **100** (see the broken lines **300** in FIG. 5, which represent the induced pressure rise within the target interval **10** generated by the second deviated well **200**). Herein, the modification of the in-situ stress provides an increase in overall fracture volume as well as fracture propagation in a desired direction from the first deviated well **100** toward the second deviated well **200**.

In other words, a second deviated well **200** may be employed to pressurize a target interval **10** in the vicinity of a first deviated fracturing well **100** up to a pressure just below the fracturization pressure of the target interval **10**. Pressurization of the target interval **10** via the second deviated well **200** is effective to correct the effective stress near the first deviated fracturing well **100**. This modification of the effective stress directs or otherwise provides for fracture propagation from the first deviated fracturing well **100** to the second deviated well **200**—the direction of minimum stress. In addition, pressurization of the target interval **10** via the second deviated well **200** provides an increased fracture volume resulting in increased flow of fracturing fluid from the first deviated well **100** toward the second deviated well **200** for recovery purposes. Once fracturing operations are completed, the second deviated well **200** may be put on production (1) to recover fracturing fluid, (2) to assist the first deviated well **100** in well production or (3) both.

In another embodiment as shown in FIG. 6, it is contemplated that two or more secondary deviated wells **200**, **300** may be employed to pressurize a target interval **10** in the

vicinity of a first deviated fracturing well **100** up to a pressure just below the fracturization pressure of the target interval **10** in a manner effective to recover fracturing fluid there from and to assist the first deviated well **100** in well production. It is also contemplated that two or more primary deviated wells may be used to deliver fracturing fluid into a target interval **10** as desired. Without limiting the invention, surface locations **101**, **102** and **103** may be situated as desired or as otherwise required according to one or more factors at both the surface level and below the surface.

Without limiting the invention, one suitable mode of implementation includes determining or otherwise identifying one or more formation characteristics of a target interval **10** to establish criteria that may be effective for both interval fracturing and recovery operations prior to the drilling of any of the deviated wells. Exemplary formation characteristics may include, but are not necessarily limited to (1) the initial pressure of a target interval **10**, (2) the fracturization pressure of a target interval **10**, (3) the permeability of a target interval **10**, (4) the depth of a target interval **10**, (5) the cubic area of the rock formation of the target interval **10**, (6) distribution of in situ stress in the target formation and in neighbor formations, and combinations thereof. As understood by persons in the art of drilling, the initial pressure of a target interval **10** (also commonly referred to as “initial reservoir pressure”) refers to the virgin or original pressure of a target interval **10** and corresponds to the drill stem test (“DST”) pressure. The fracturization pressure or “frac pressure” of a particular target interval **10** is the pressure at which an interval **10** begins to fracture under pressure. The frac pressure may be determined by performing a minifrac in the interval **10**. The permeability of a target interval **10**, i.e., the measurement of an interval’s ability to transmit fluids, may be determined via well tests including, but not necessarily limited to core analysis, nuclear magnetic resonance log (“NMR”), wireline formation tester, drill stem test (“DST”), and combinations thereof. Exemplary criteria may include, but are not necessarily limited to the size and length of the deviated wells **100**, **200**, the orientation of the deviated wells **100**, **200**, the depth of the deviated wells **100**, **200**, i.e., the distance between the first deviated well **100** and the second deviated well **200**, the fracturing fluid(s) to be used, the duration of stimulation (or duration of pressurization) of the interval **10** and the duration of fracturing of the interval **10**. By establishing one or more of the above parameters, the present system and method are operationally effective to optimize hydrocarbon productivity of the target interval **10**.

In one suitable mode of operation, once a target interval **10** is selected for production purposes, the target interval **10** may be evaluated to determine one or more formation characteristics as described above. Once one or more formation characteristics are determined, the information may be used to establish desired system criteria according to any number of calculations and/or computer simulations. For example, once the fracturization pressure, permeability and depth of a target interval **10** are known, first and second deviated wells **100**, **200** may be installed at depths effective for the second deviated well **200** to pressurize the target interval **10** a duration effective to correct the in-situ stress near the first deviated well **100**. Typically, once the optimum duration of pressurization is met using the second deviated well **200**, an operator may commence pressurization, and fracturing, of a target interval **10** via the first deviated well **100**.

Herein, an optimal duration of pressurization may be defined as the amount of time necessary to pressurize the

target interval **10** to modify the in-situ stress of the target interval **10** in the vicinity of a first deviated well **100** in order to form a desired fracture network volume between the deviated wells **100**, **200**. If pressurization lasts too long, then too much of the interval **10** may be pressurized resulting in undesirable fracture formation within the target interval **10**. If pressurization is too short, then the effective stress near the first deviated well **100** may not be modified to form a desired fracture network volume between the deviated wells **100**, **200**. Thus, calculations including computer simulations may be employed to determine optimal pressurization and duration thereof based on input data related to one or more of the above described parameters.

Generally, the distance between the first and second deviated wells **100**, **200** includes a distance effective to produce a large volume fracture network above the second deviated well **200** whereby the second deviated well **200** engages at least a portion of the fracture network. As shown in the simplified embodiment of FIG. 7, an optimal distance between the first and second deviated wells **100**, **200** is that distance effective to produce a large volume fracture network **12** (see fracture network labeled **12A**) between the first and second deviated wells **100**, **200** whereby the second deviated well **200** engages at least a portion of the fracture network **12**. An optimal distance between wells **100** and **200** may also be described as a distance effective to prevent fractures from propagating beyond either the uppermost edge of the target interval **10** (see fracture network labeled **12B**) or the lowermost edge of the target interval **10**. In one embodiment, about 80.0 percent or more of the fracture network **12** is suitably located above the second deviated well **200**. In another embodiment, about 90.0 percent or more of the fracture network **12** is suitably located above the second deviated well **200**. As such, there is a correlation between the volume of the fracture network **12** located above the second deviated well **200** and the flow back ratio of fracturing fluid. Generally, the greater the volume of the fracture network **12** located above the second deviated well **200** the greater the flow back ratio of fracturing fluid.

It is also contemplated that the distance between wells **100**, **200** may be determined according to one or more time considerations. For instance, a particular target interval **10** may require fracturing to be performed within a certain period of time. Likewise, an operator may desire to produce a target interval **10** by a certain future date. In a simplified example, if a target interval **10** has a known depth, permeability and fracturization pressure and the first and second deviated wells **100**, **200** are set apart a known distance, calculations, including for example computer simulations, may be employed to determine the amount of time required for the second deviated well **200** to optimally correct the stress in the vicinity of the first deviated well **100** without reaching the fracturization pressure of the target interval **10**. If an operator desires to put the same interval **10** on production more slowly or more quickly, calculations, including for example computer simulations, may be employed to determine new depths for each of the first and second deviated wells **100**, **200**. For example, if an operator desires for the interval **10** to be put on production more quickly than realized via initial calculations or simulations, the operator may perform additional calculations and/or simulations to determine how much closer the first and second deviated wells **100**, **200** may need to be installed downhole while still achieving desired stress correction in the vicinity of the first deviated well **100** without reaching the fracturization pressure of the target interval **10**. In cases where the interval is very thick and/or the permeability is

extremely low, the optimum distance between the wells depends on an acceptable time required to pressurize the system before fracking. For example, if an interval is about 400.00 meters (about 1312.34 feet) thick top to bottom, an operator may set the two deviated wells **100**, **200** about 91.44 meters (about 300.00 feet) apart, in order to maximize the proportion of the interval that is to be stimulated. In such a case, however, it may be necessary to pressurize for a very long time before stress is efficiently modified in the vicinity of the primary well **100**. If a set time is unacceptable for operational reasons, it may be necessary to reduce the distance between the two deviated wells **100**, **200**. In such case, stress modification is achieved faster in the vicinity of the primary well **100**, but the fracture depth achieved may be reduced.

In still another embodiment, it is contemplated that wells **100**, **200** may be installed in a target interval **10** where the formation characteristics are not known. In such embodiment, the first deviated well **100** and the second deviated well **200** may be installed according to one or more baseline considerations or parameters effective to provide desired fracture formation within the target interval **10**. For example, once the depth of a target interval **10** is determined, a first deviated well **100** may be installed near the uppermost border of a target interval **10** at a depth from about 0.125 to about 0.40 the total depth of the target interval **10**. In one particular embodiment, the first deviated well **100** may be installed at a depth of about one-third ( $\frac{1}{3}$ ) the depth of the corresponding interval **10** (see for example FIG. 7)—which may be referred to herein as a baseline depth of the first deviated well **100**. In addition, the second deviated well **200** may be installed in the target interval **10** below the first deviated well **100** at a depth from about 0.60 to about 0.95 the depth of the target interval **10**. In one particular embodiment, the second deviated well **200** may be installed at a depth of about two-thirds ( $\frac{2}{3}$ ) the depth of the corresponding interval **10** (see FIG. 7)—which may be referred to herein as a baseline depth of the second deviated well **200**.

Absent information regarding the formation characteristics of a target interval **10**, it is further contemplated that information may be collected regarding other similar intervals to generate calculations, including for example computer simulations, to determine system criteria including, but not necessarily limited to the size and length of the deviated wells **100**, **200**, the orientation of the deviated wells **100**, **200**, the depth of the deviated wells **100**, **200**, the fracturing fluid to be used, the duration of pressurization of the interval **10**, the duration of fracturing of the interval **10**, and combinations thereof. In one example, a downhole pressure gauge may be set close to the perforation of a first deviated well **100**. When the second deviated well **200** starts pressurizing the interval **10**, an operator may record pressure at the first deviated well **100** until pressure starts rising. Once sufficient pressure variation has been recorded at the first deviated well **100** the effective stress has been efficiently modified below the first deviated well **100** and fracking operations may be initiated.

The invention will be better understood with reference to the following non-limiting examples, which are illustrative only and not intended to limit the present invention to a particular embodiment.

#### EXAMPLE 1

In a first non-limiting example, an unconventional reservoir of a target interval **10** is selected for production purposes. Prior to fracturing operations, the depth of the target

## 13

interval **10**, the cubic area of the rock formation of the target interval **10**, the fracturization pressure of the target interval **10** and the permeability of the target interval **10** are determined. The depths of the first and second deviated wells **100**, **200** are initially set according to their baseline depths of  $\frac{1}{3}$  and  $\frac{2}{3}$  as shown in FIG. 7.

Using this data, one or more computer model simulations are run at varying durations according to a stimulation pressure level just under the fracturization pressure of the interval **10** to identify an optimal duration of stimulation of the target interval **10** according to the baseline depths of the first and second deviated wells **100**, **200**. The duration of stimulation is defined as the time necessary to pressurize the target interval **10** to modify the in-situ stress of the target interval **10** in the vicinity of a first deviated well **100** at its baseline depth.

A first simulation is run according to a duration of 480 hours, whereby the computer model produces a graph of representative isopressures according to FIGS. 8A and 8B. A second simulation is run according to a duration of 720 hours, whereby the computer model produces a graph of representative isopressures according to FIGS. 9A and 9B. A third simulation is run according to a duration of 1440 hours, whereby the computer model produces a graph of representative isopressures according to FIGS. 10A and 10B.

The graphs are reviewed to determine the desired duration for stimulating the target interval **10** to modify the in-situ stress of the target interval **10** in the vicinity of a first deviated well **100**. From a review of the generated graphs, a duration of 480 hours is chosen as an optimal duration time. Once the duration is established, the first and second deviated wells **100**, **200** may be installed in the target interval **10** for fracturing and hydrocarbon recovery operations.

## EXAMPLE 2

In a second non-limiting example, an unconventional reservoir of a target interval **10** in the Woodford Shale is selected for production purposes according to the system and method of this application. Located in south-central Oklahoma, U.S.A., the Woodford Shale ranges in depth from about 1829 meters to about 3353 meters (from about 6,000 feet to about 11,000 feet) according to the United States Department of Energy. The Woodford Shale play encompasses an area of about 17,703 km<sup>2</sup> (about 11,000 square miles). The average thickness of the Woodford Shale varies from about 36.6 meters to about 67.1 meters (from about 120 feet to 220 feet).

## EXAMPLE 3

In a third non-limiting example, an unconventional reservoir of a target interval **10** is selected for production purposes. Prior to fracturing operations, the depth of the target interval **10**, the cubic area of the rock formation of the target interval **10**, the fracturization pressure of the target interval **10** and the permeability of the target interval **10** are determined. The depths of the first and second deviated wells **100**, **200** are initially set according to their baseline depths of  $\frac{1}{3}$  and  $\frac{2}{3}$ .

With attention to the simplified illustration of FIG. 7, the second deviated well **200** is suitably drilled at a lateral distance effective to induce fracture propagation from the most distal stage (Stage I) to the stage nearest the vertical portion of the well **100** (Stage V). In addition, the baseline depths of the first and second deviated wells **100**, **200** are

## 14

operationally effective to ensure that larger fractures **12A** propagate across a majority of a target interval **10** between the wells **100**, **200** relegating smaller volume fractures **12B** directionally away from the second deviated well **200**.

## EXAMPLE 4

In a fourth non-limiting example, an unconventional reservoir of a target interval **10** is selected for production purposes according to the system and method of this application. Prior to fracturing operations, the depth of the target interval **10**, the cubic area of the rock formation of the target interval **10**, the fracturization pressure of the target interval **10** and the permeability of the target interval **10** are determined. The depths of the first and second deviated wells **100**, **200** are initially set according to their baseline depths of  $\frac{1}{3}$  and  $\frac{2}{3}$ .

Using this data, one or more computer model simulations are run at a stimulation pressure just under the fracturization pressure of the interval **10** to determine the duration of stimulation of the target interval **10** according to the baseline depths of the wells **100**, **200**. Once the duration of stimulation for the baseline depths is established, the depths of the first and second deviated wells **100**, **200** may be adjusted as desired via calculations and/or computer modeling to meet a different duration of stimulation using the same stimulation pressure level.

## EXAMPLE 5

In a fifth non-limiting example, an unconventional reservoir of a target interval **10** is selected for production purposes. Prior to fracturing operations, the depth of the target interval **10**, the cubic area of the rock formation of the target interval **10**, the fracturization pressure of the target interval **10** and the permeability of the target interval **10** are determined. Characteristics of the reservoir target interval **10** include:

target interval **10** thickness: 30.48 meters, 100.0 feet  
 permeability: 1 micro-Darcy,  
 porosity: 0.3  
 viscosity of the fluid in place: 1.0 cp  
 density of the fluid in place: 1.00 g/cm<sup>3</sup>, 62.5 lb/ft<sup>3</sup>  
 Compressibility of the fluid in place: 3.0 e-5 psi<sup>-1</sup>  
 Young's modulus: 6.89475729×10<sup>9</sup> Pa, 1.0 e6 psi  
 Poisson's ratio: 0.2  
 overburden stress: 48263301.1 Pa, 7000.0 psi  
 maximum initial horizontal stress: 20684271.9 Pa, 3000.0 psi  
 minimum initial horizontal stress: 18615844.7 Pa, 2700.0 psi  
 initial reservoir pressure: 6894757.29 Pa, 1000.0 psi.

Referring to FIG. 11, the primary and secondary deviated wells **100** and **200** are installed a distant apart about 4.57 meters (about 15.0 feet). According to reservoir characteristics, a first computer model simulation is performed for a fracturization operation of the target interval **10** at the primary well **100** only. Operation results are shown in FIG. 11, which represents the tensile deformation ("dy"—values given in the legend have been normalized) of the fracturization medium in the direction orthogonal to the fracture plane (such plane being along directions x and z as per FIG. 11). This corresponds to the predicted propagation of the fracture—a higher absolute value of dy predicts a larger opening of the fracture at that particular location.

Using the same reservoir characteristics, a second computer model simulation is performed wherein the secondary

15

well **200** is used for initial injection of the target interval **10** for 75 days. During the initial injection operation, the bottom-hole pressure for the secondary well **200** is controlled at about 689475.73 Pa (about 100 psi) below the minimum horizontal stress to prevent any fracturing of the target interval **10** to occur. After 75 days of injection, the secondary well **200** is shut-in as understood by the skilled artisan and fracturization of the target interval **10** is performed via the primary well **100**. FIG. **12** represents the tensile deformation of the medium in the direction orthogonal to the fracture plane. The comparison between FIGS. **11** and **12** demonstrate that the system and method of this application is effective to optimize and control the development of generated fractures in the target interval **10**. In particular, the simulation results of FIG. **12** demonstrate that the fracture is larger and propagates further downward when a secondary well **200** is used before the primary well **100** to modify the in-situ stress of the target interval **10** during the first injection period, prior to the fracturization period.

One skilled in the art will recognize that while the teachings herein may be performed downhole, they are also applicable to evaluations conducted on the surface, such as in a laboratory or via a computer. For example, in one implementation at least a portion of the invention may be performed using computer modeling, while other measurements and determinations may be performed on location downhole.

While the invention has been described with reference to an exemplary embodiment or embodiments, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the spirit and scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment disclosed as the best mode contemplated for carrying out this invention, but that the invention will include all embodiments falling within the scope of the claims. Also, in the drawings and the description, there have been disclosed exemplary embodiments of the invention and, although specific terms may have been employed, they are unless otherwise stated used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention therefore not being so limited. Moreover, the use of the terms first, second, etc. do not denote any order or importance, but rather the terms first, second, etc. are used to distinguish one element from another. Furthermore, the use of the terms a, an, etc. do not denote a limitation of quantity, but rather denote the presence of at least one of the referenced item. The embodiment(s) described herein are meant to be illustrative only and should not be taken as limiting the invention, which is defined in the claims.

We claim:

**1.** A method of improving hydrocarbon fluid productivity of a primary deviated well in an unconventional low permeability porous subterranean target earth interval, comprising:

installing a secondary deviated well in the unconventional low permeability porous subterranean target earth interval substantially laterally aligned with the primary deviated well, the primary deviated well defining a first perforated interval, the secondary deviated well being located at a depth greater than the primary deviated well, the secondary deviated well defining a second perforated interval;

16

pressurizing the unconventional low permeability porous subterranean target earth interval via the secondary deviated well to induce localized modifications of effective stress between the primary and secondary deviated wells to promote fracture propagation directionally from the primary deviated well toward the second deviated well;

fracturing the unconventional low permeability porous subterranean target earth interval by delivering one or more fracturing fluids into the interval via the primary deviated well increasing fracture propagation directionally from the primary deviated well toward the second deviated well producing a desired fracture network volume between the primary and secondary deviated wells; and

recovering the one or more fracturing fluids and the hydrocarbon fluid located in the unconventional low permeability porous subterranean target earth interval via the primary and secondary deviated wells.

**2.** The method of claim **1** wherein the distance between the primary and secondary deviated wells is effective to prevent fractures from propagating beyond either the uppermost edge of the unconventional low permeability porous subterranean target earth interval or the lowermost edge of the unconventional low permeability porous subterranean target earth interval.

**3.** The method of claim **2** wherein about 80.0 percent or more of the fracture network is located above the secondary deviated well.

**4.** The method of claim **1** wherein the second perforated interval is about equal to or greater in size than the first perforated interval.

**5.** The method of claim **1** wherein prior to pressurizing the unconventional low permeability porous subterranean target earth interval, the unconventional low permeability porous subterranean target earth interval is evaluated to determine in-situ properties selected from the group consisting of the permeability of the unconventional low permeability porous subterranean target earth interval, the fracturization pressure of the permeability of the unconventional low permeability porous subterranean target earth interval, the stress regimes affecting the stress anisotropy of the unconventional low permeability porous subterranean target interval, the stress anisotropy of the unconventional low permeability porous subterranean target interval, the presence, the mechanical properties of the unconventional low permeability porous subterranean target interval, the closure pressure of the unconventional low permeability porous subterranean target interval, and combinations thereof.

**6.** A method of improving fluid hydrocarbon productivity of an unconventional low permeability porous subterranean target earth interval, comprising:

determining the fracturization pressure, permeability, depth and distribution of in situ stress of the unconventional low permeability porous subterranean target earth interval;

providing a first deviated well at a first depth within the unconventional low permeability porous subterranean target earth interval and a second deviated well at a second depth, the second depth being greater than the first depth;

injecting pressurized fluid into the second deviated well up to a pressure just below the fracturization pressure of the unconventional low permeability porous subterranean target earth interval in a manner effective to modify stress conditions of the unconventional low

17

permeability porous subterranean target earth interval between the first and second wells; and injecting one or more fracturing fluids into the first deviated well whereby the stress of the unconventional low permeability porous subterranean target earth interval influences fracture propagation toward the second deviated well producing a desired fracture network volume between the primary and secondary deviated wells.

7. The method of claim 6 wherein the second deviated well is installed in the target earth interval in a manner effective to maximize the capture and recovery of fracturing fluid injected into the target earth interval via the first deviated well.

8. The method of claim 6 wherein the second deviated well is directed in substantially parallel alignment with the first deviated well.

9. The method of claim 6 wherein the mode of determining permeability is selected from the group consisting of core analysis, nuclear magnetic resonance log, wireline formation tester, drill stem test, and combinations thereof.

10. The method of claim 6 wherein the second deviated well engages fractures propagated from the first deviated well.

11. The method of claim 6 wherein the first and second deviated wells act in concert to recover fracturing fluid and hydrocarbon based fluids from a unconventional low permeability porous subterranean target earth interval.

12. The method of claim 6 wherein the second deviated well is provided to pressurize the unconventional low permeability porous subterranean target earth interval in the vicinity of a first deviated well up to a pressure just below the determined fracturization pressure of the unconventional low permeability porous subterranean target earth interval.

13. The method of claim 6 whereby once the fracturization pressure, permeability, depth and distribution of in situ stress is determined, the information is used to establish (1) the depths of the first and second deviated wells effective for the second deviated well to pressurize the unconventional low permeability porous subterranean target earth interval, (2) the injection pressure of fluid into the second deviated well and (3) the duration of injecting pressurized fluid into the second deviated well effective to correct the in-situ stress near the first deviated well.

14. A method of improving hydrocarbon fluid productivity of a primary deviated well in an unconventional low permeability porous subterranean target earth interval, comprising:

- (1) providing a system for fracturing an unconventional low permeability porous subterranean target earth formation, including:
  - a fracture inducing assembly deliverable to a first location in an unconventional low permeability porous subter-

18

reanean target earth formation and operationally configured to induce fractures in the unconventional low permeability porous subterranean target earth formation; and

- a pressure inducing assembly deliverable to a second location in the unconventional low permeability porous subterranean target earth formation and operationally configured to pressurize the unconventional low permeability porous subterranean target earth formation in a manner effective to induce selective fracture formation from the fracture inducing assembly directionally toward the pressure inducing assembly;
  - (2) installing the fracture inducing assembly at a first depth and installing the pressure inducing assembly at a second depth greater than the first depth in the unconventional low permeability porous subterranean target earth interval, the fracture inducing assembly defining a first perforated interval, the pressure inducing assembly defining a second perforated interval;
  - (3) pressurizing the unconventional low permeability porous subterranean target earth interval via the pressure inducing assembly up to a pressure just below the fracturization pressure of the unconventional low permeability porous subterranean target earth interval to induce localized modifications of effective stress between the fracture inducing assembly and the pressure inducing assembly;
  - (4) fracturing the unconventional low permeability porous subterranean target earth interval by delivering one or more fracturing fluids into the interval via the fracture inducing assembly thereby increasing fracture propagation directionally toward the pressure inducing assembly producing a desired fracture network volume there between; and
  - (5) recovering the one or more fracturing fluids and hydrocarbon fluid located in the unconventional low permeability porous subterranean target earth interval via the fracture inducing assembly and the pressure inducing assembly.
15. The method of claim 14 wherein the depths of the fracture inducing assembly and the pressure inducing assembly may be determined prior to installation in a manner effective to optimally correct stress in the vicinity of the fracture inducing assembly without reaching a fracturization pressure of the unconventional low permeability porous subterranean target earth interval.
16. The method of claim 14 wherein the system further includes pressurized fluid deliverable to the second location and one or more fracturing fluids deliverable to the first location.

\* \* \* \* \*